Geographic Information Systems

U.S. Department of the Interior
U.S. Geological Survey

Geographic information systems (GIS) technology can be used for scientific investigations, resource management, and development planning. For example, a GIS might allow emergency planners to easily calculate emergency response times in the event of a natural disaster, or a GIS might be used to find wetlands that need protection from pollution.

What is a GIS?

In the strictest sense, a GIS is a computer system capable of assembling, storing, manipulating, and displaying geographically referenced information, i.e., data identified according to their locations. Practitioners also regard the total GIS as including operating personnel and the data that go into the system.

How does a GIS work?

Relating information from different sources

If you could relate information about the rainfall of your State to aerial photographs of your county, you might be able to tell which wetlands dry up at certain times of the year. A GIS, which can use information from many different sources, in many different forms, can help with such analyses. The primary requirement for the source data is that the locations for the variables are known. Location may be annotated by x, y, and z coordinates of longitude, latitude, and elevation, or by such systems as ZIP Codes or highway mile markers. Any variable that can be located spatially can be fed into a GIS.

Several computer data bases that can be directly entered into a GIS are being produced by Federal agencies and private firms. Different kinds of data in map form can be entered into a GIS (figs. 1 and 2). A GIS can also convert existing digital information, which may not yet be in map form, into forms it can recognize and use. For example, digital satellite images can be analyzed to produce a map-like layer of digital information about vegetative cover (figs. 3 and 4). Likewise, census or hydrologic tabular data can be converted to map-like form, serving as layers of thematic information in a GIS (figs. 5 and 6).

Figure 1. U.S. Geological Survey (USGS) digital line graph (DLG) data of roads.

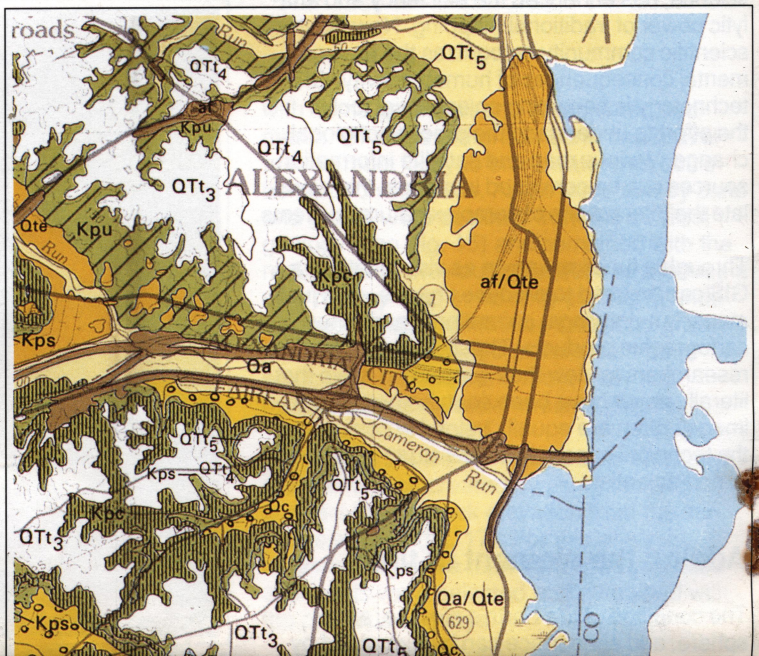

Data capture

How can a GIS use the information in a map? If the data to be used are not already in digital form, that is, in a form the computer can recognize, various techniques can capture the information. Maps can be digitized, or hand-traced with a computer mouse, to collect the coordinates of features (fig. 7). Electronic scanning devices will also convert map lines and points to digits (fig. 8).

A GIS can be used to emphasize the spatial relationships among the objects being mapped. While a computer-aided mapping system may represent a road simply as a line, a GIS may also recognize that road as the border between wetland and urban development, or as the link between Main Street and Blueberry Lane.

Data capture—putting the information into the system—is the time-consuming component of GIS work. Identities of the objects on the map must be specified, as well as their spatial relationships. Editing of information that is automatically captured can also be difficult. Electronic scanners record blemishes on a map just as faithfully as they record the map features. For example, a fleck of dirt might connect two lines that should not be connected. Extraneous data must be edited, or removed from the digital data file.

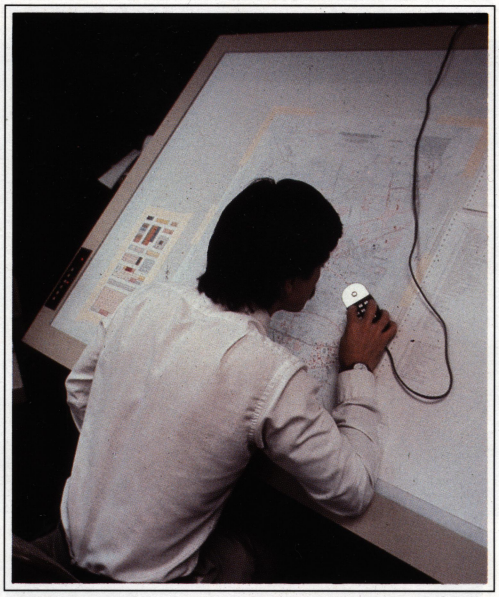

Figure 7. Converting map information to digital form using a hand-held computer mouse.

Figure 8. An electronic scanning device will convert some types of map information to digital form.

Data integration

A GIS makes it possible to link, or integrate, information that is difficult to associate through any other means. Thus, a GIS can use combinations of mapped variables to build and analyze new variables (fig. 9).

Using GIS technology and water company billing information, it is possible to simulate the discharge of materials into the septic systems in a neighborhood upstream from a wetland. The bills show how much water is used at each address. The amount of water a customer uses will roughly predict the amount of material that will be discharged into the septic systems, so that areas of heavy septic discharge can be located using a GIS.

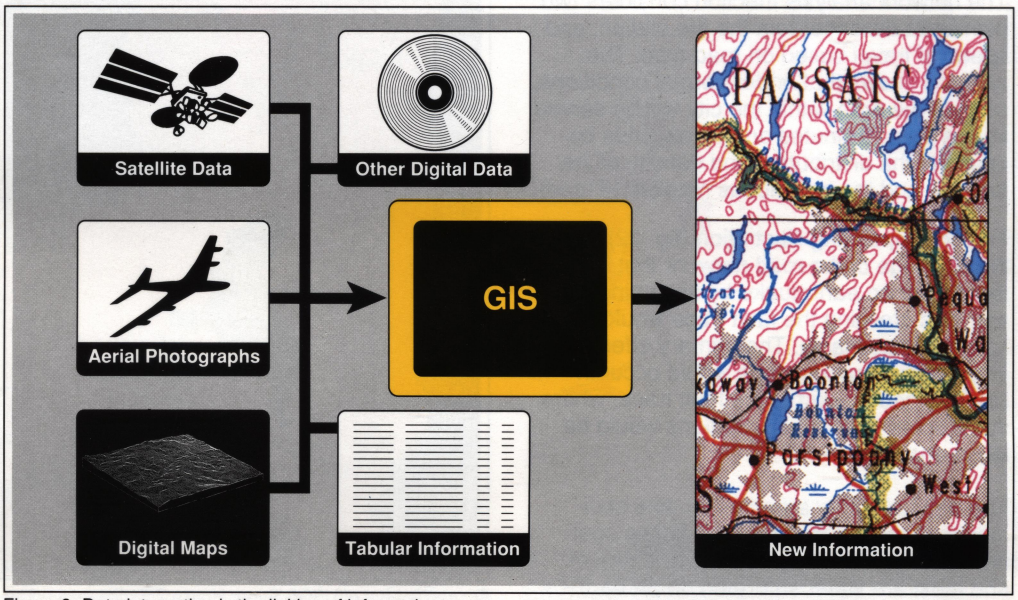

Figure 9. Data integration is the linking of information in different forms through a GIS.

Projection and registration

A property ownership map might be at a different scale from a soils map. Map information in a GIS must be manipulated so that it registers, or fits, with information gathered from other maps. Before the digital data can be analyzed, they may have to undergo other manipulations—projection conversions, for example—that integrate them into a GIS.

Projection is a fundamental component of mapmaking. A projection is a mathematical means of transferring information from the Earth's three-dimensional, curved surface to a two-dimensional medium—paper or a computer screen. Different projections are used for different types of maps because each projection is particularly appropriate to certain uses. For example, a projection that accurately represents the shapes of the continents will

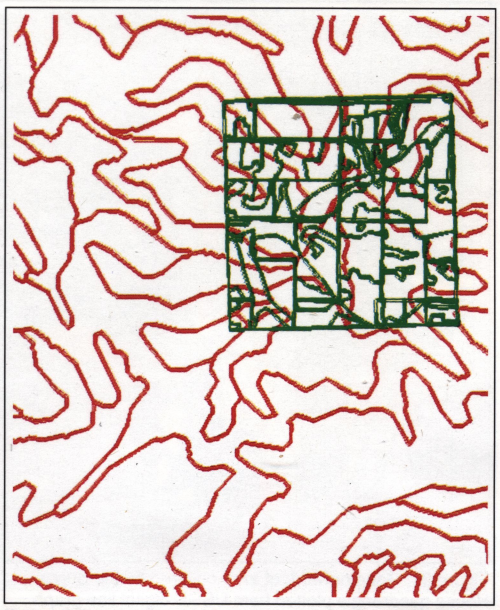

Figure 10a. A property ownership map is shown in green on top of a soils map in red. The two maps have different

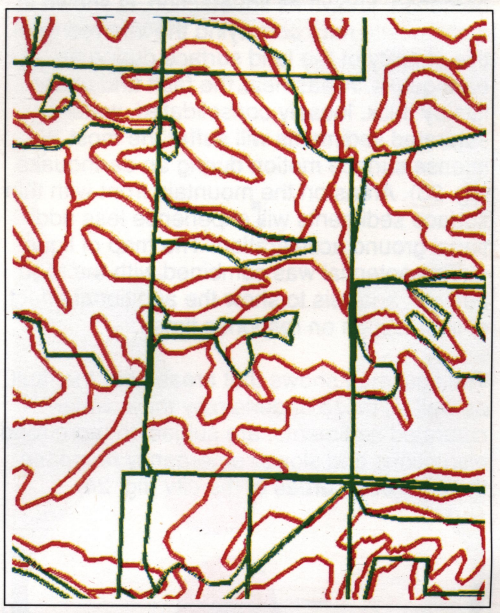

Figure 10b. The property map (green) has been reprojected to match the projection and scale of the soils map (red).

Figure 3. Raw satellite image data.

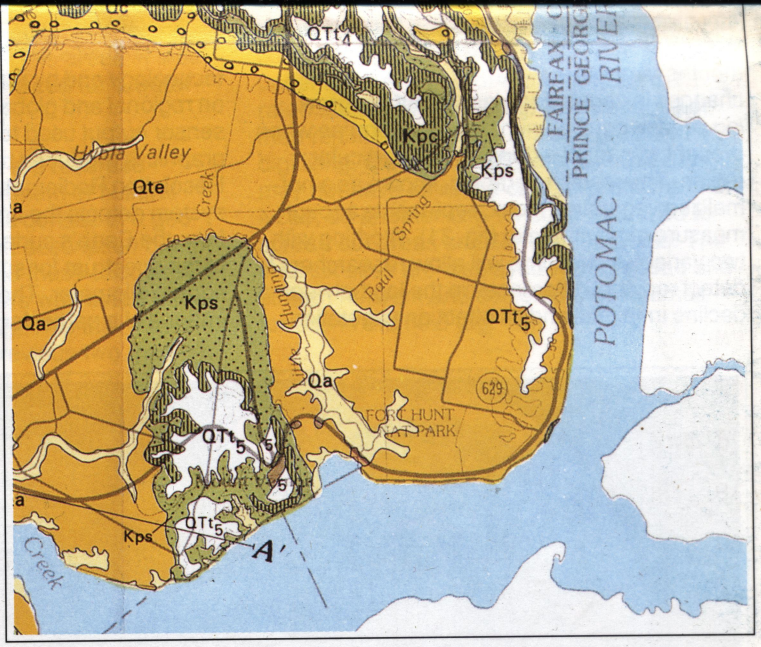

Figure 2. USGS geologic map.

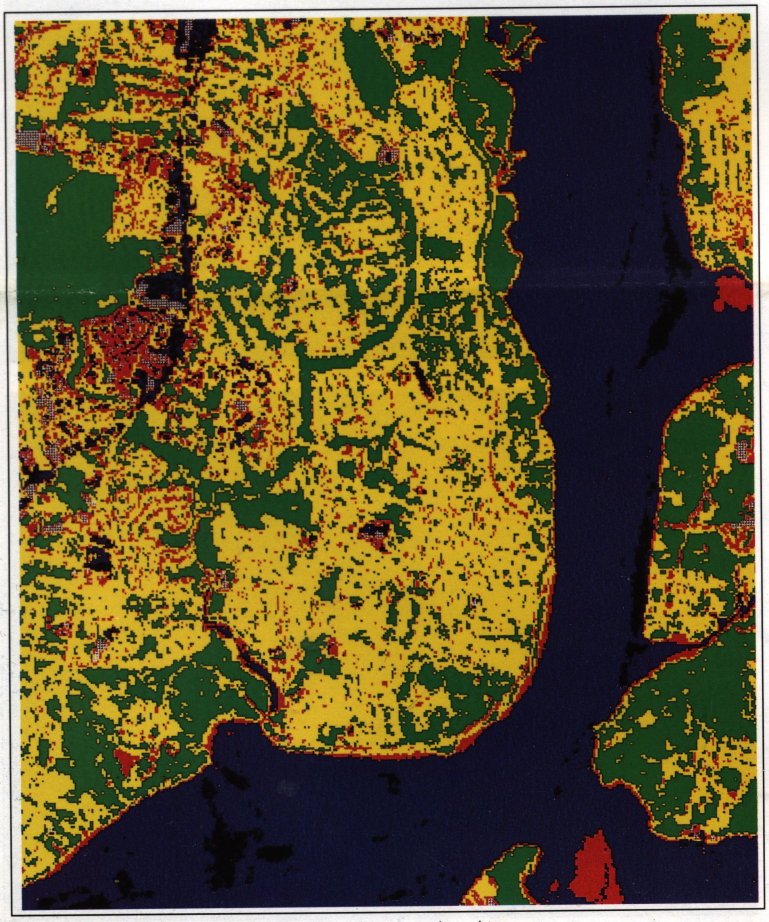

Figure 4. Satellite image data in fig. 3 has been analyzed to show classes of vegetative cover.

529001	1	Shuteye Br	529001	19	Mu
529001	36N	Frk South	Fabius 529001	54	Da
529001	71	Hickory Northern	529001	89	St
529001	106	Dogwood Road	529001	124E	Po
529001	141	Meadow Ave	529001	159W	Ma
529001	176E	Hickory St	529001	194E	Wa
529001	211N	Don St	529001	229N	Ma
529001	246S	Cottage Grove St	529001	264E	Br
529001	281E	Link Dr	529001	299	Be
529001	316	Clg Park St	529001	334	Lo
529001	351	Brushy nut	529001	369	El
529001	386	Surratt			

Figure 5. A portion of a census data file containing address information.

LOCATION.--Lat 39:15:16, Long 077:34:36, H

DRAINAGE AREA.-- 89.60 mi2 (232.07

PERIOD OF RECORD.-- 1971-1987

STREAMFLOW (CFS),

DAY	Oct	Nov	Dec	Jan
1	47	150	360	64
2	60	143	235	118
3	66	141	188	111
4	52	113	165	85
5	48	96	146	146
6	46	90	146	107
7	40	87	600	84
8	37	80	475	77
9	37	75	335	80
10	349	74	282	148

Figure 6. A portion of a hydrologic data report indicating recorded stream flow amounts for a particular stream gage.

ly represents the shapes of the continents will distort their relative sizes.

Since much of the information in a GIS comes from existing maps, a GIS uses the processing power of the computer to transform digital information, gathered from sources with different projections, to a common projection (figs. 10a and b).

Data structures

Can a property ownership map be related to a satellite image, a timely indicator of land uses? Yes, but since digital data are collected and stored in various ways, the two data sources may not be entirely compatible. So a GIS must be able to convert data from one structure to another.

Image data from a satellite that has been interpreted by a computer to produce a land use map can be "read into" the GIS in raster format. Raster data files consist of rows of uniform cells coded according to data values. An example would be land cover classification (fig. 11). Raster data files can be manipulated quickly by the computer, but they are often less detailed and may be less visually appealing than vector data files, which can approximate the appearance of more traditional hand-drafted maps. Vector digital data have been captured as points, lines (a series of point coordinates), or areas (shapes bounded by lines) (fig. 12). An example of data typically held in a vector file would be the property boundaries for a housing subdivision.

Data restructuring can be performed by a GIS to convert data into different formats. For example, a GIS may be used to convert a satellite image map to a vector structure by generating lines around all cells with the same classification, while determining the cell spatial relationships, such as adjacency or inclusion (fig. 13). Thus, a GIS can be used to analyze land use information in conjunction with property ownership information.

Data modeling

It is difficult to relate wetlands maps to rainfall amounts recorded at different points such as airports, television stations, and high schools. A GIS, however, can be used to depict two- and three-dimensional characteristics of the Earth's surface, subsurface, and atmosphere from information points.

For example, a GIS can quickly generate a map with lines that indicate rainfall amounts (figs. 14 and 15). Such a map can be thought of as a rainfall contour map. Many sophisticated methods can estimate the characteristics of surfaces from a limited number of point measurements. A two-dimensional contour map created from the surface modeling of rainfall point measurements may be overlain and analyzed with any other map in a GIS covering the same area.

1	1	1	3	3	3	3	3	3
1	1	1	3	3	3	3	3	3
1	1	2	2	2	2	3	3	3
1	1	2	2	2	2	2	3	3
1	2	2	2	2	2	3	3	3
3	3	3	2	2	2	3	3	3
3	3	3	3	2	3	3	3	3
3	3	3	3	3	3	3	3	3

1 Residential 2 Water 3 Farmland

Figure 11. Example of the structure of a raster data file.

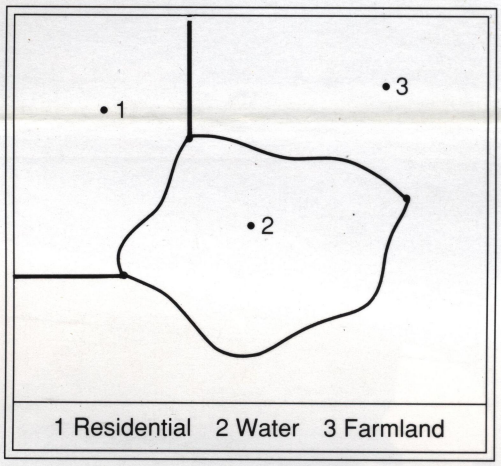

Figure 12. Example of the structure of a vector data file.

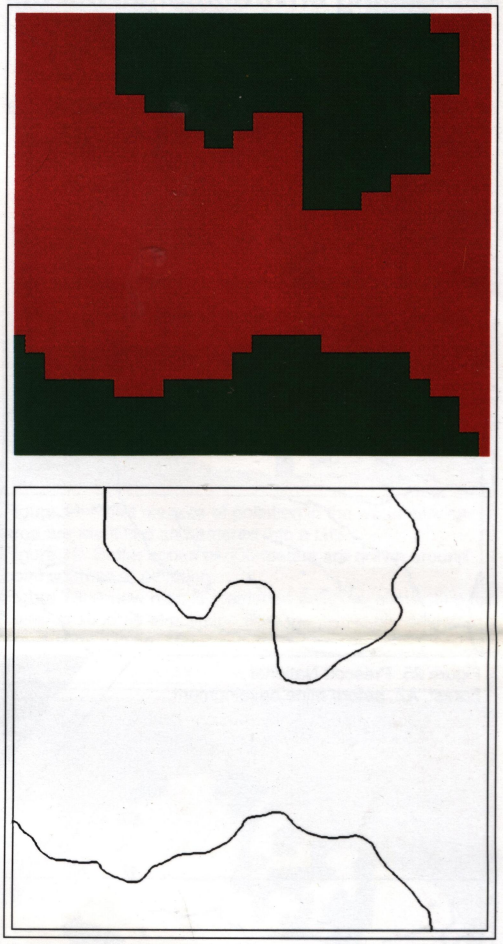

Figure 13. Magnified view of the same GIS data file, shown both in raster format (top) and converted into vector format (bottom).

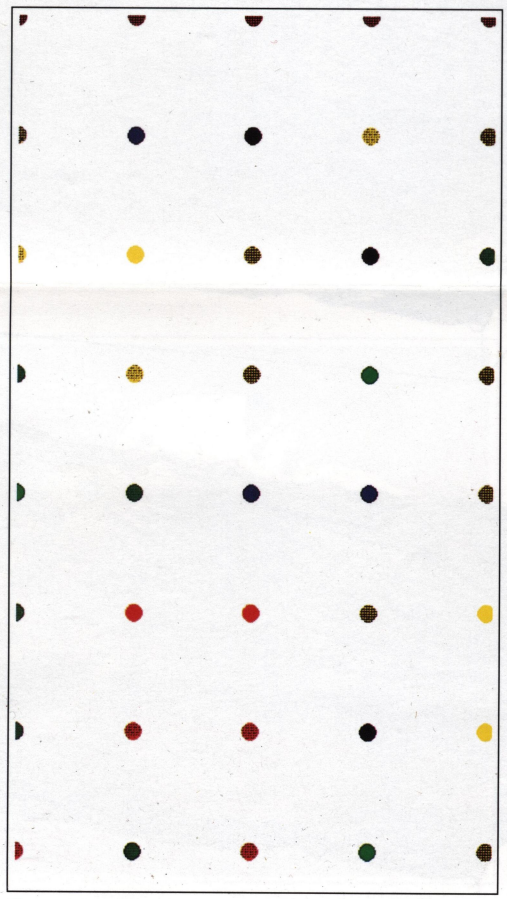

Figure 14. Points with known amounts of rainfall, ranging from high (yellow) to low (black). These points will be used to create a contour map.

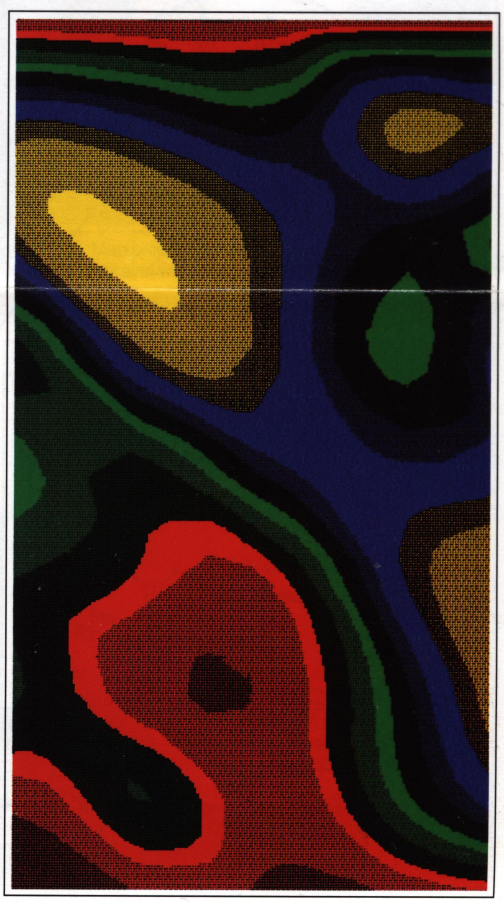

Figure 15. Contour map made from rainfall points shown in fig. 14. Areas with the highest amounts of rainfall are shown in yellow, and the lowest in black.

What's special about a GIS?

The way maps and other data have been stored or filed as layers of information in a GIS makes it possible to perform complex analyses.

Information retrieval

What do you know about the swampy area at the end of your street? With a GIS you can "point" at a location, object, or area on the screen and retrieve recorded information about it from off-screen files (fig. 16). Using scanned aerial photographs as a visual guide, you can ask a GIS about the geology or hydrology of the area or even about how close a swamp is to the end of a street. This kind of analytic function allows you to draw conclusions about the swamp's environmental sensitivity.

Topological modeling

In the past 35 years, were there any gas stations or factories operating next to the swamp? Any within two miles and uphill from the swamp? A GIS can recognize and analyze the spatial relationships among mapped phenomena. Conditions of adjacency (what is next to what), containment (what is enclosed by what), and proximity (how close something is to something else) can be determined with a GIS (fig. 17).

Networks

If all the factories near a wetland were accidentally to release chemicals into the river at the same time, how long would it take for a damaging amount of pollutant to enter the wetland reserve? A GIS can simulate the route of materials along a linear network. It is possible to assign values such as direction and speed to the digital stream and "move" the contaminants through the stream system (fig. 18).

Overlay

Using maps of wetlands, slopes, streams, land use, and soils (figs. 19a–e), the GIS might produce a new map layer or overlay that ranks the wetlands according to their relative sensitivity to damage from nearby factories or homes (fig. 19f).

Data output

A critical component of a GIS is its ability to produce graphics on the screen or on paper that convey the results of analyses to the people who make decisions about resources. Wall maps and other graphics can be generated, allowing the viewer to visualize and thereby understand the results of analyses or simulations of potential events (fig. 20).

```
  72° 32' 30.27" W (  -72.5417)      41° 55' 23.76" N ( 41.9233)
 703844      m                      4643966      m
 9723        univ                   5434         univ
  Grid Reference    18TYB 384443966

well PROXIMITY TO WELLS                .5   km
circ PROXIMITY TO POLLUTION             1   km
road CORRIDORS FROM ROADS              .5   km
slop COMPOSITE SLOPE                   0 %
```

Figure 16. A crosshair pointer (top) can be used to point at a location stored in a GIS. The bottom illustration depicts a computer screen containing the kind of information stored about the location—for example the latitude, longitude, projection, coordinates, closeness to wells, sources of pollution, roads, and the slope of the land.

Figure 17. Sources of pollution are represented as points. The colored circles show distance from pollution sources. The wetlands are in green.

Figure 18. A GIS can simulate the movement of materials along a network of lines. This illustration shows the route of pollutants through a stream system. Flow directions are indicated by arrows. On the left, flow is superimposed on aerial photography of the area; on the right, flow is shown on a schematic drawing of the streams.

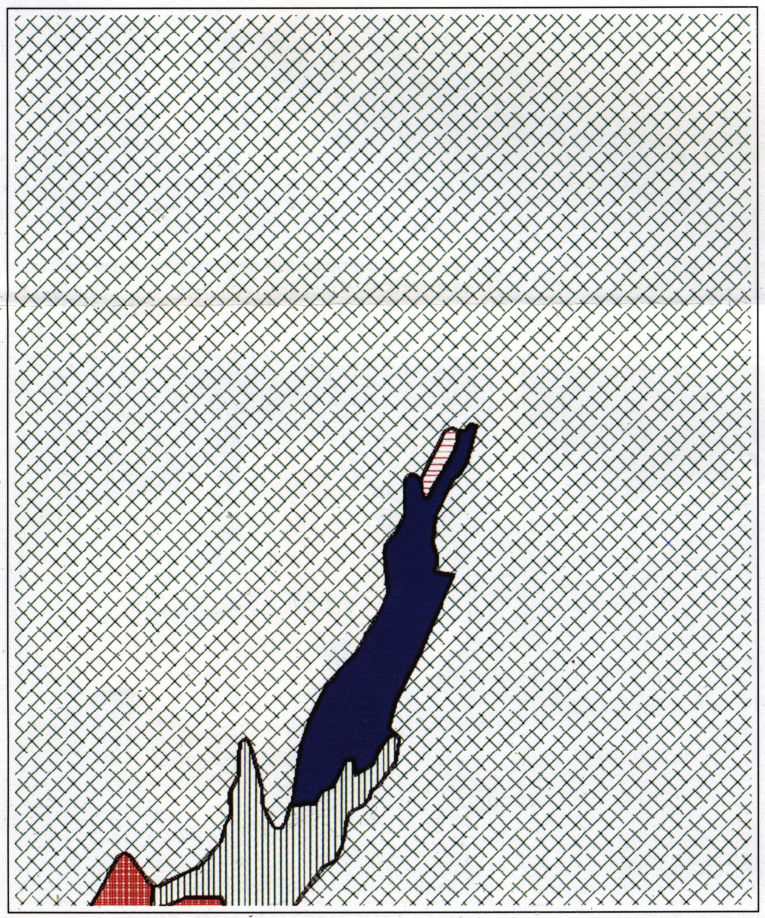

Figure 19a. Map of wetlands in the study area.

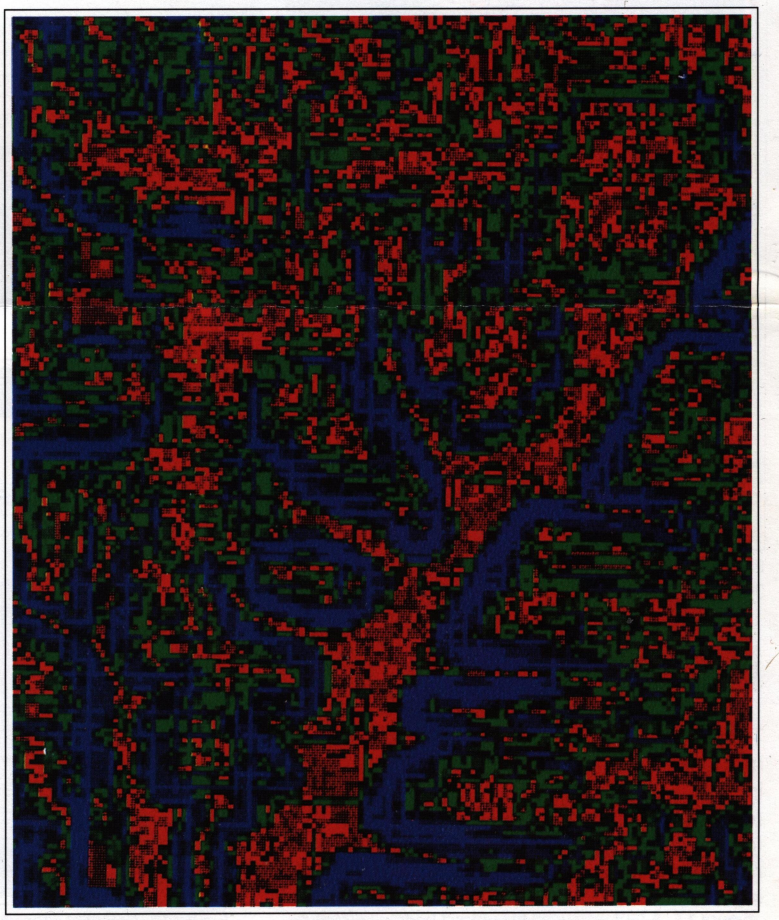

Figure 19b. Slope map created by a GIS from elevation information.

Figure 19c. Distances to streams derived from a digital map of hydrography.

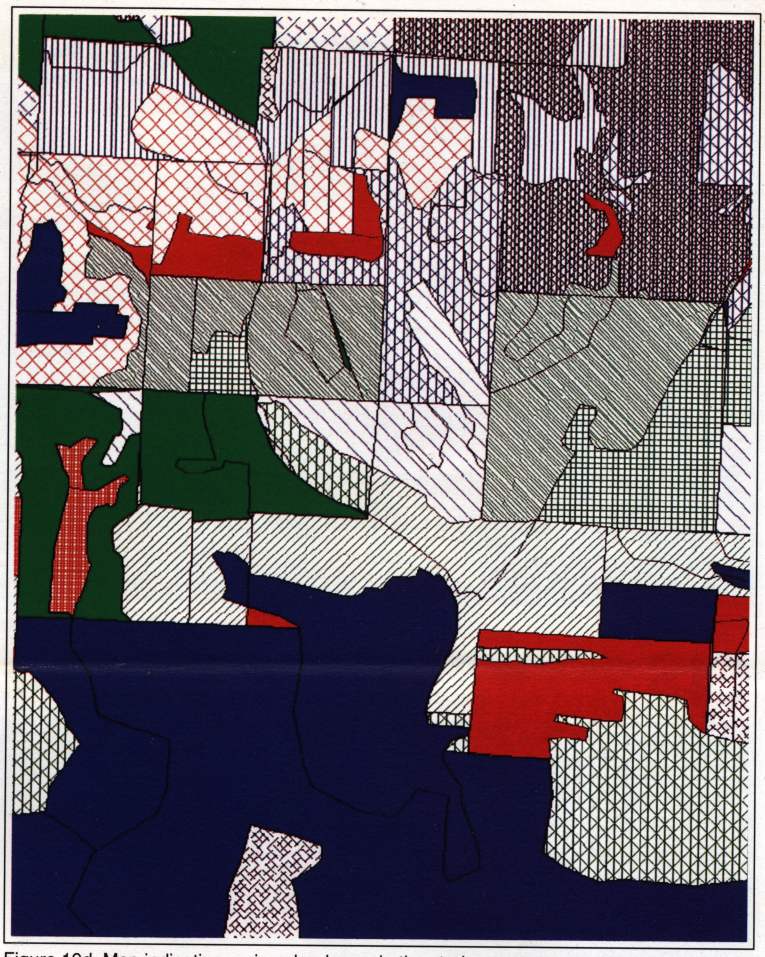

Figure 19d. Map indicating various land uses in the study area.

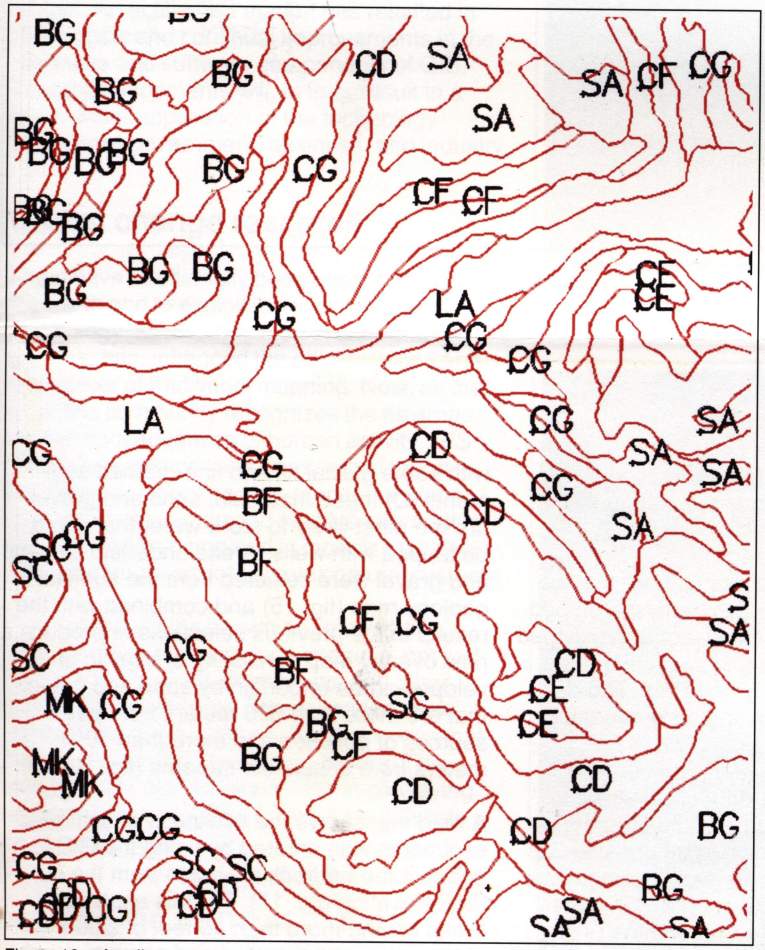

Figure 19e. A soils map stored in a GIS data base. Letter codes indicate soil type.

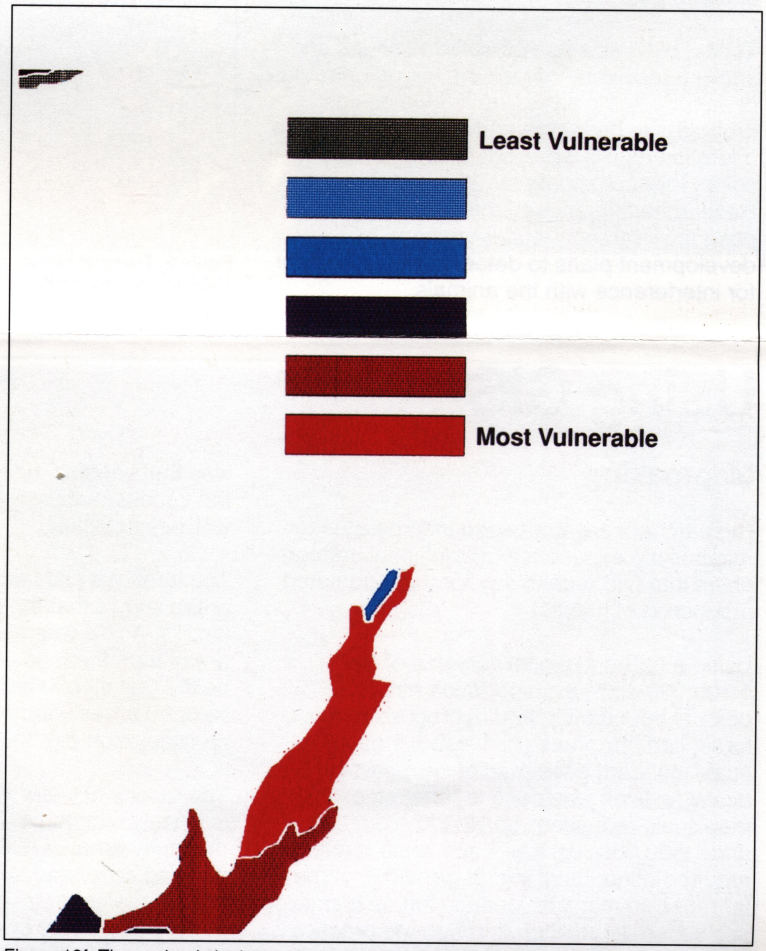

Figure 19f. The wetlands in the study area are ranked according to their vulnerability to pollution based on the combination of factors related by using a GIS.

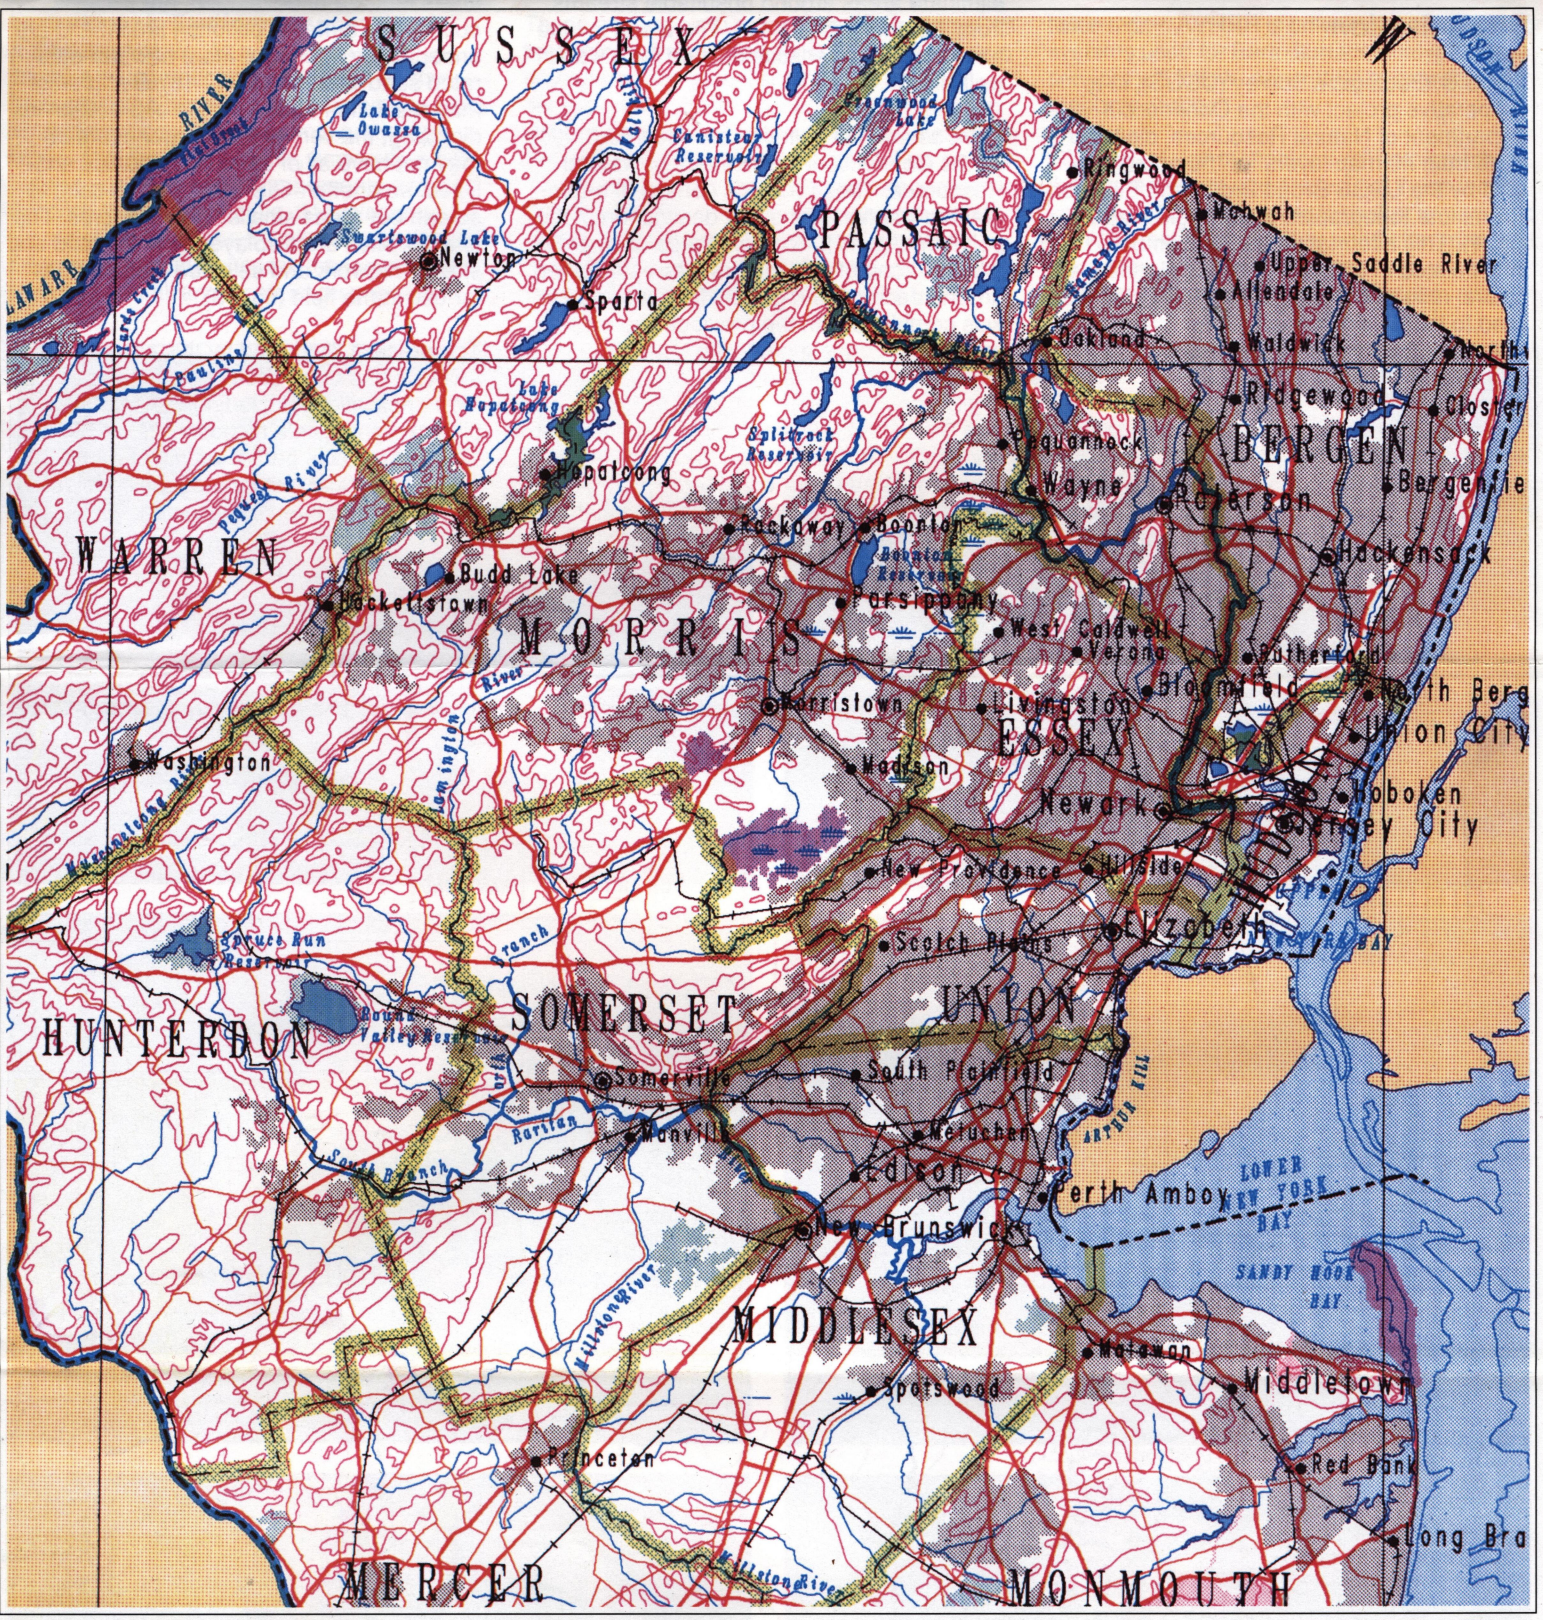

Figure 20. An example of a finished map that can be generated using a GIS.

Framework for cooperation

The use of GIS may encourage cooperation and communication among the agencies involved in environmental protection and resource management. The collection of data for a GIS, however, is costly. Data collection requires computer equipment and technical expertise that may be very specialized.

Standard data formats ease the exchange of digital information among users of different systems. So standardization helps to stretch data collection funds further by allowing data sharing, and, in many cases, gives users access to data they could not otherwise collect for economic or technical reasons.

For more information

A good place to begin to learn more about GIS technology would be the geography department of your local university. Other sources of information might be your State or county department of natural resources, or a USGS Earth Science Information Center (ESIC). To locate your nearest ESIC, call 1-800-USA-MAPS.

Applications of GIS

Figure 1. Group of stags (cave painting), Lascaux Caves, France (Art Resource, NY).

GIS through history

On the walls of caves near Lascaux, France, Cro-Magnon hunters drew pictures of the animals they hunted 35,000 years ago (fig. 1). Associated with the animal drawings are track lines and tallies thought to depict migration routes. These early records followed the two-element structure of modern geographic information systems: a graphic file linked to an attribute data base.

Today, biologists use collar transmitters and satellite receivers to track the migration routes of caribou and polar bears to help design programs to protect the animals. In a GIS, the migration routes were indicated by different colors for each month for 21 months (fig. 2). Researchers then used the GIS to superimpose the migration routes on maps of oil development plans to determine the potential for interference with the animals.

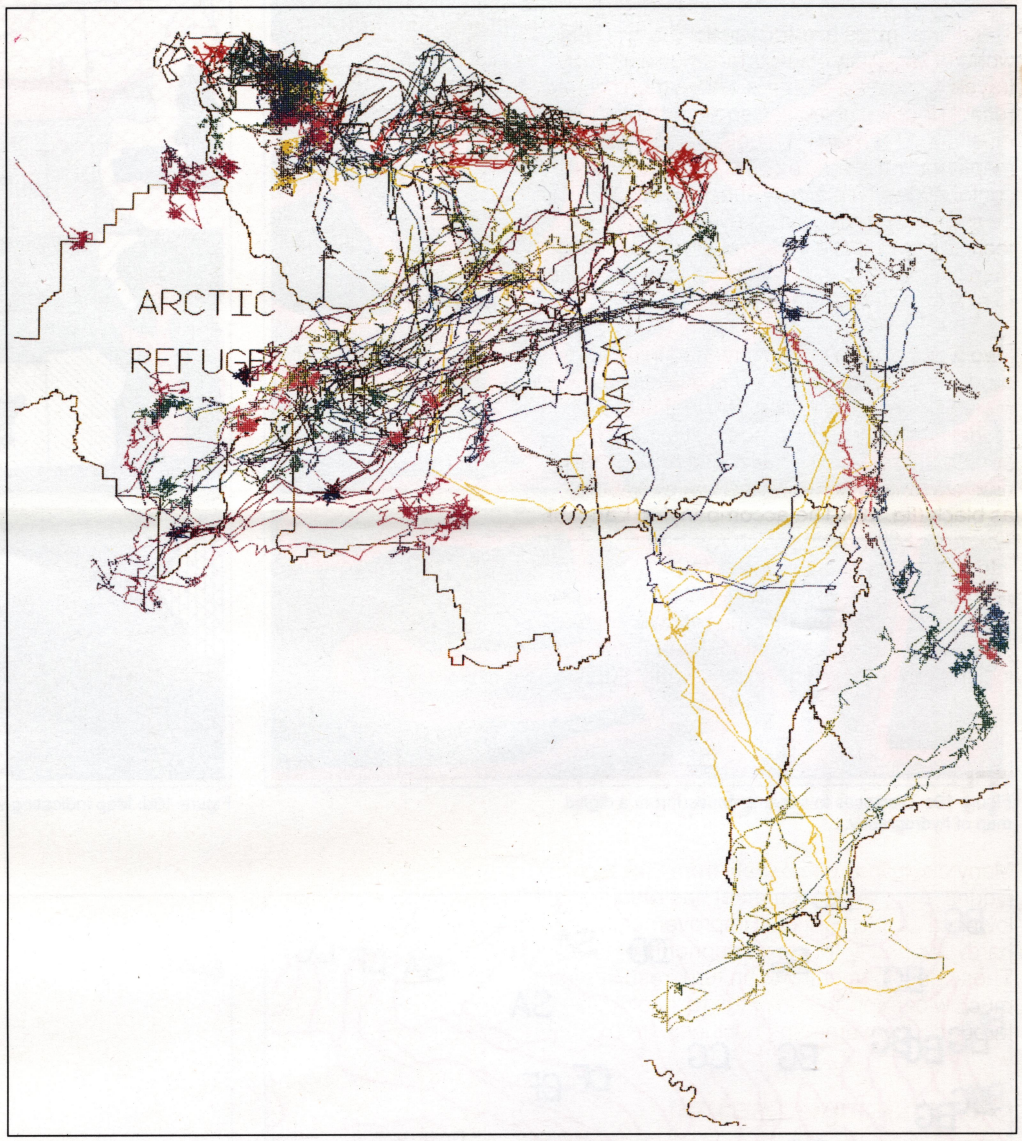

Figure 2. Tracks of caribou routes in Alaska from April 1985, to December 1986 (U.S. Fish and Wildlife Service).

Using GIS

Mapmaking

Researchers are working to incorporate the mapmaking experience of traditional cartographers into GIS technology for the automated production of maps.

Using a GIS and digital versions of the 1:100,000-scale transportation network, political boundaries, and hydrographic features, cartographers produced a 1:500,000-scale standard base map of New Jersey. This digital revision was done in three steps of map scale reduction: 1:100,000, 1:250,000, and 1:500,000 (fig. 3a). Each scale reduction required edge matching, or paneling, of the larger scale maps to produce the next smaller scale map. In addition, through the process known as generalization, the amount of information was reduced to make the smaller scale map readable (figs. 3b, c, and d).

was the "window" used to view and combine the various map coverages relevant to the well site selection.

The land use and land cover map for the two areas shows that the area is partly developed (fig. 7). A GIS was used to select undeveloped areas from the land use and land cover map as the first step in finding well sites. The developed areas were eliminated from further consideration (fig. 8).

The quality of water in Connecticut streams is closely monitored. Some of the streams in the study area were known to be unusable as drinking water sources. To avoid pulling water from these streams into the wells, 100-meter buffer zones were created around the unsuitable streams using the GIS, and the zones were plotted on the map (fig. 9). The map showing the buffered zones was combined

with some glacial till and fine-grained sediments. Of these materials, sand and gravel are the most likely to store water that could be tapped with wells. Areas underlain by sand and gravel were selected from the surficial geology map (fig. 15) and combined with the results of the previous selections to produce a new overlay map consisting of sites in undeveloped areas underlain by sand and gravel that are more than 500 meters from point sources of pollution and more than 100 meters from unsuitable streams (fig. 16).

A map that shows the thickness of saturated sediments was created by using the GIS to subtract the bedrock elevation from the surface elevation (fig. 17). For this analysis, areas having more than 40 feet of saturated sediments were selected and combined with the previous overlays.

Figure 4.

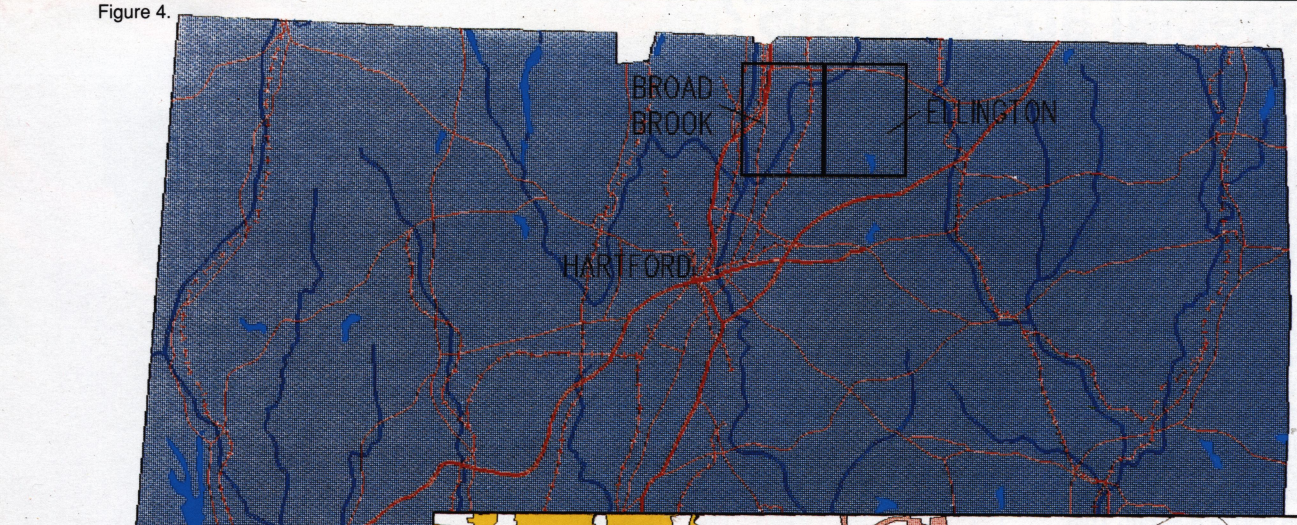

Figure 4. USGS digital line graph map of the State of Connecticut from 1:2,000,000-scale data. The Broad Brook and Ellington 7.5-minute quadrangle areas are outlined in black in the upper middle.

Figure 5.

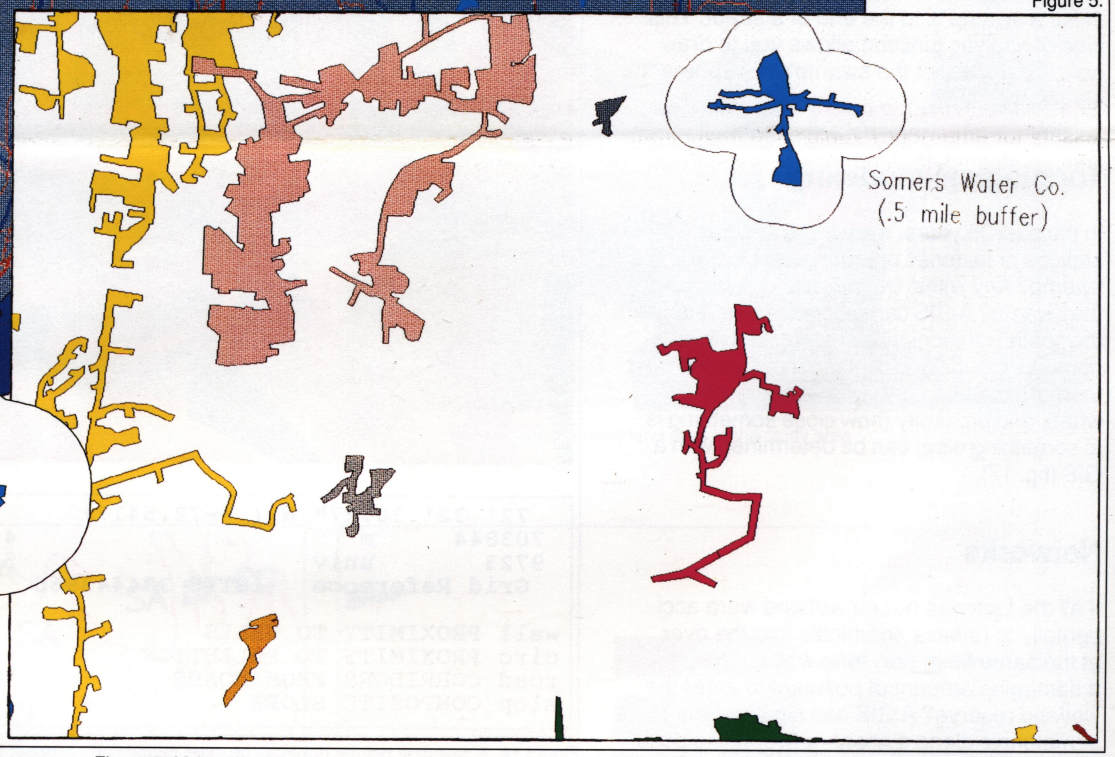

Figure 5. Map of the areas covered by the Broad Brook and Ellington 7.5-minute quadrangles, showing the Somers Water Company service area at a scale of 1:24,000.

Figure 6.

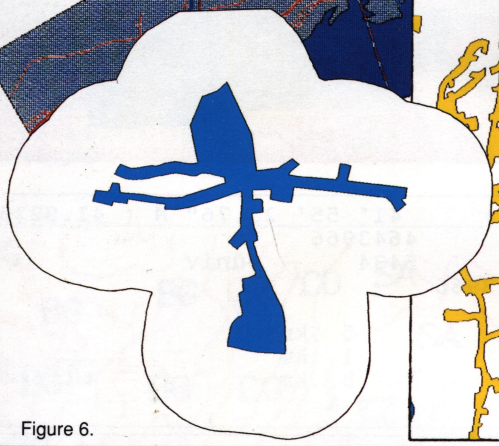

Figure 6. Enlarged view of fig. 5 showing a half-mile buffer zone drawn around the service area of the Somers Water Company.

Figure 7.

Figure 7. Land use and land cover data for the area bounded by the half-mile buffer zone around the water company service area.

Figure 8.

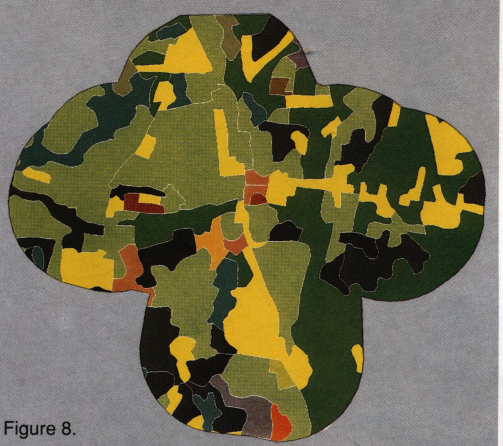

Figure 8. Land use and land cover data shown in fig. 7 has been reselected to eliminate developed areas.

Figure 11.

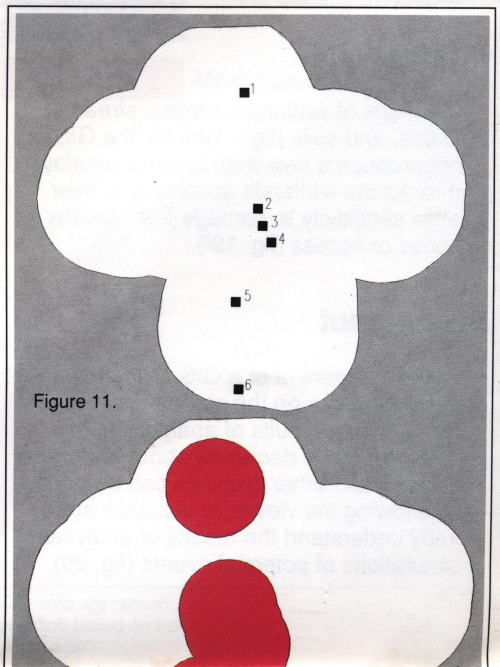

Site selection

The U.S. Geological Survey (USGS), in a cooperative project with the Connecticut Department of Natural Resources, digitized more than 40 map layers for the areas covered by the USGS Broad Brook and Ellington 7.5-minute topographic quadrangle maps (fig. 4). This information can be combined and manipulated in a GIS to address planning and natural resource issues. GIS information was used to locate a potential site for a new water well within half a mile of the Somers Water Company service area (fig. 5).

To prepare the analysis, digital maps of the water service areas were stored in the GIS. Using the buffer function in the GIS, a half-mile zone was drawn around the water company service area (fig. 6). This buffer zone with the land use and land cover map to eliminate areas around unsuitable streams from the analysis (fig. 10). The areas in blue have the characteristics desired for a water well site.

Point sources of pollution are recorded by the Connecticut Department of Natural Resources. These records consist of a geographic location and a text description of the pollutant (fig. 11). To avoid these toxic areas, a buffer zone of 500 meters was established around each point (fig. 12). This information was combined with the previous two map layers to produce a new map of areas suitable for well sites (fig. 13).

The map of surficial geology shows the earth materials that lie above bedrock (fig. 14). Since the area under consideration in Connecticut is covered by glacial deposits, the surface consists largely of sand and gravel, The resulting site selection map shows areas that are undeveloped, are situated outside the buffered pollution areas, and are underlain by 40 feet or more of water-saturated sand and gravel (fig. 18). Because of map resolution and the limits of precision in digitizing, the very small polygons (areas) may not have all of the characteristics analyzed, so another GIS function was used to screen out areas smaller than 10 acres. The final six sites are displayed with the road and stream network and selected place names for use in the field (fig. 19).

The process illustrated by this site selection analysis has been used for a number of common applications, including transportation planning and waste disposal site location. The technique is particularly useful when several physical factors must be considered and integrated over a large area.

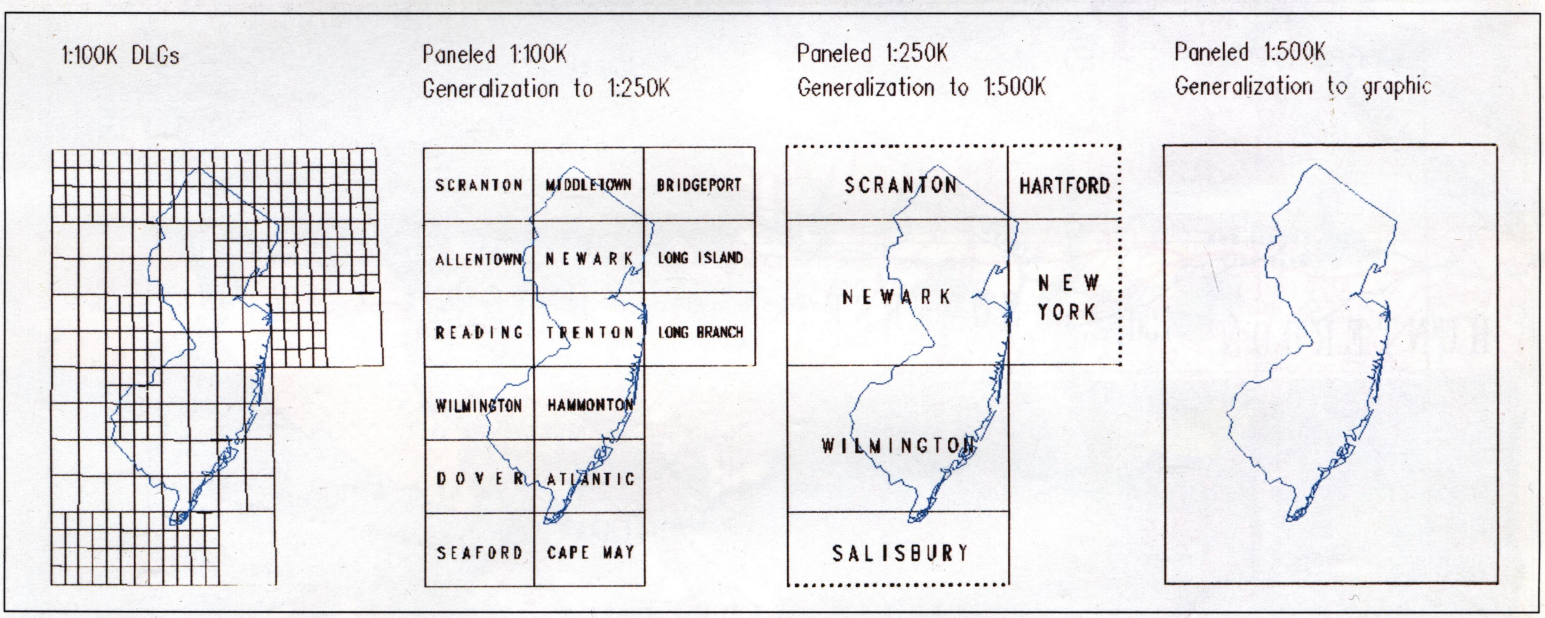

Figure 3a. Digital revision of 1:100,000-scale digital line graph data to produce a 1:500,000-scale New Jersey State base map. Paneling and generalization are shown in three stages from 1:100,000 scale, to 1:250,000 scale, to 1:500,000 scale.

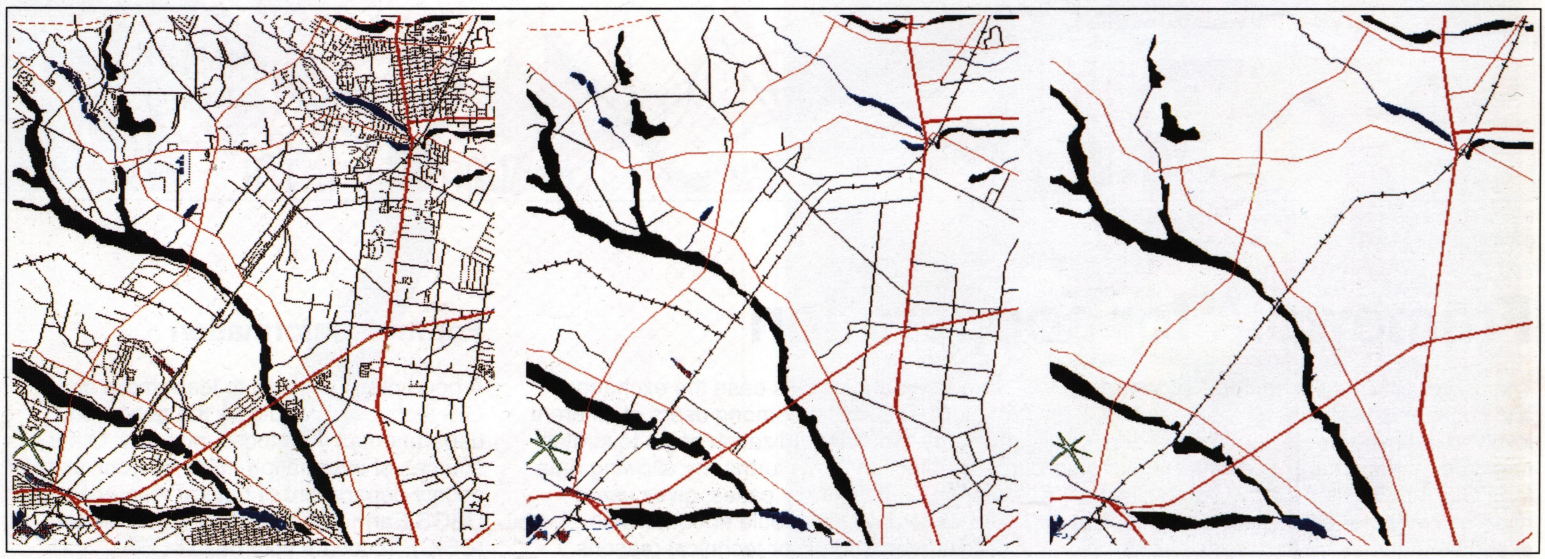

Figures 3b, c, d. These digital maps of Boone County, NJ, are all at a scale of 1:500,000. The information content of the maps has been reduced through the process of generalization in two stages from 1:100,000 scale on the left, to 1:250,000 scale in the center, then from 1:250,000 scale to 1:500,000 scale on the right.

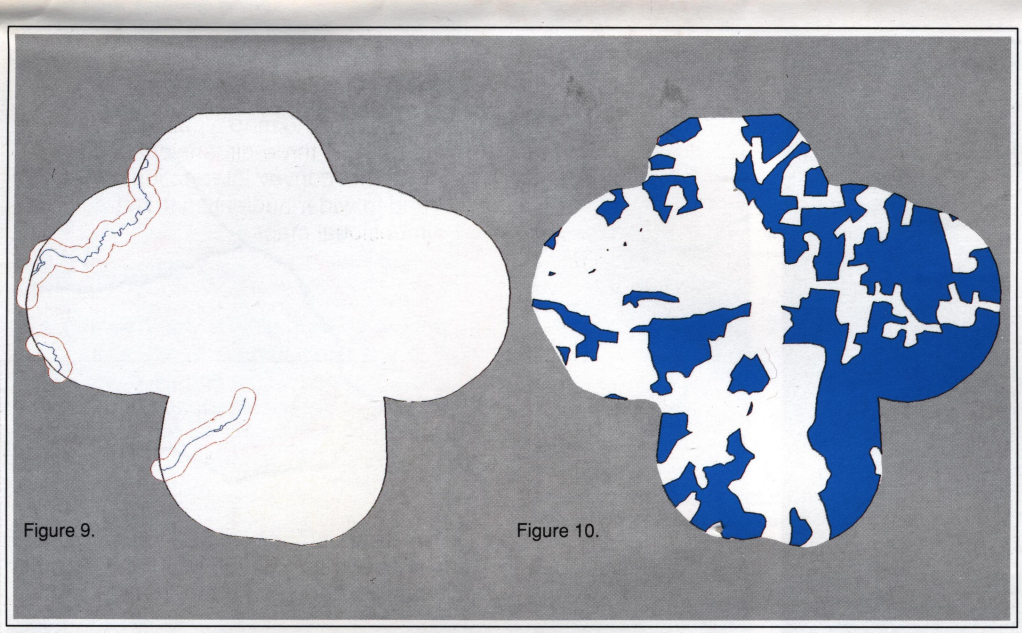

Figure 9.

Figure 9. Buffer zones of 100 meters are drawn around polluted streams in the water service area.

Figure 10.

Figure 10. Buffered streams shown in fig. 9 are subtracted from areas previously selected with the land use and land cover data.

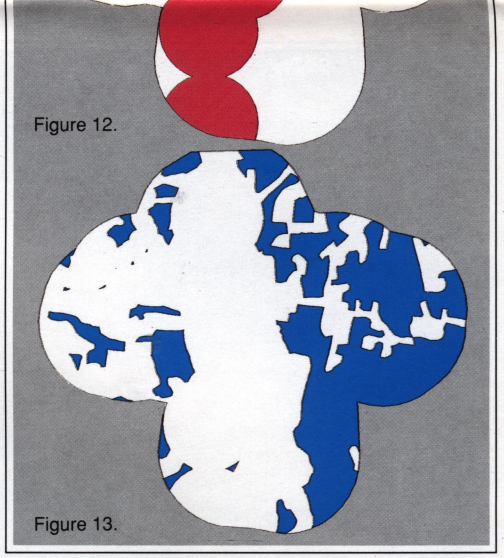

Figure 12.

Figure 13.

Figure 11. Point sources of pollution in the water service area are identified and entered into a GIS.
Figure 12. Buffer zones of 500 meters are drawn around point sources of pollution.
Figure 13. A new map is created in a GIS by eliminating the buffered sources of pollution from the previously-selected areas shown in fig. 10.

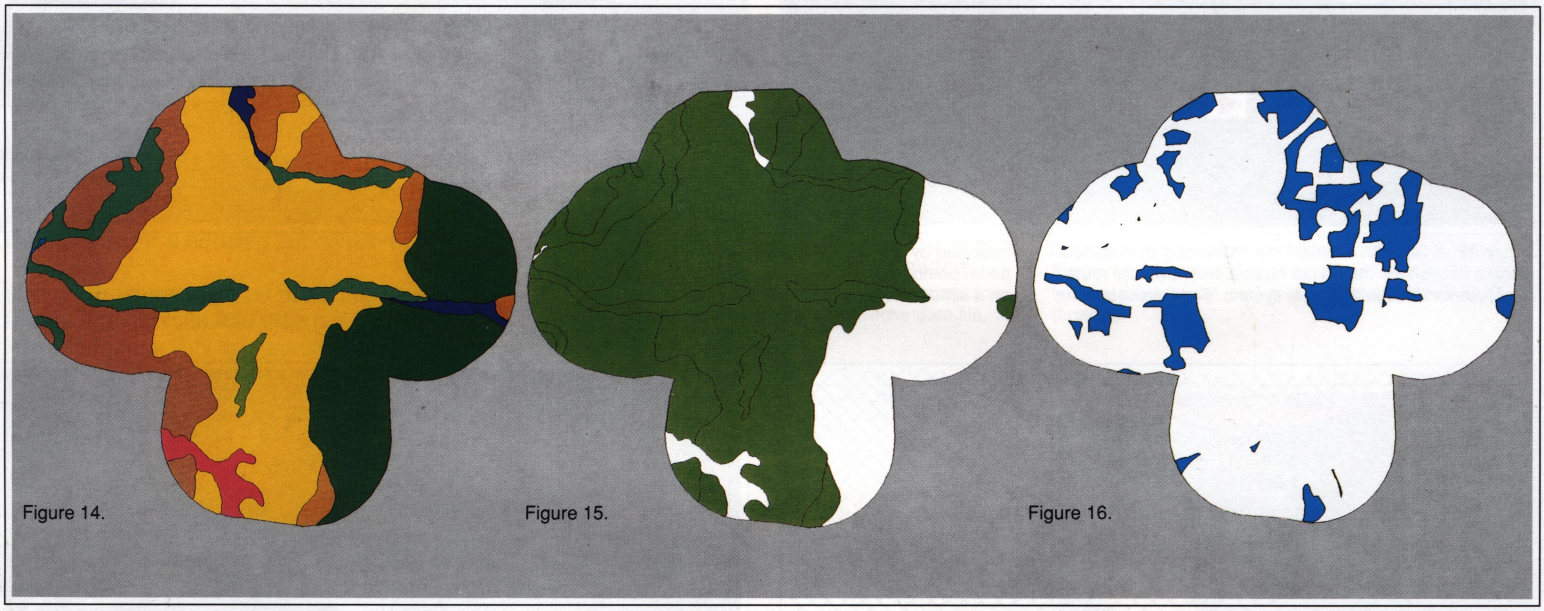

Figure 14.

Figure 15.

Figure 16.

Figure 14. Map of surficial geology of the water service area.

Figure 15. Selection of areas of sand and gravel from the map of surficial geology.

Figure 16. Map produced by combining the areas composed of sand and gravel with the previous selections from fig. 13.

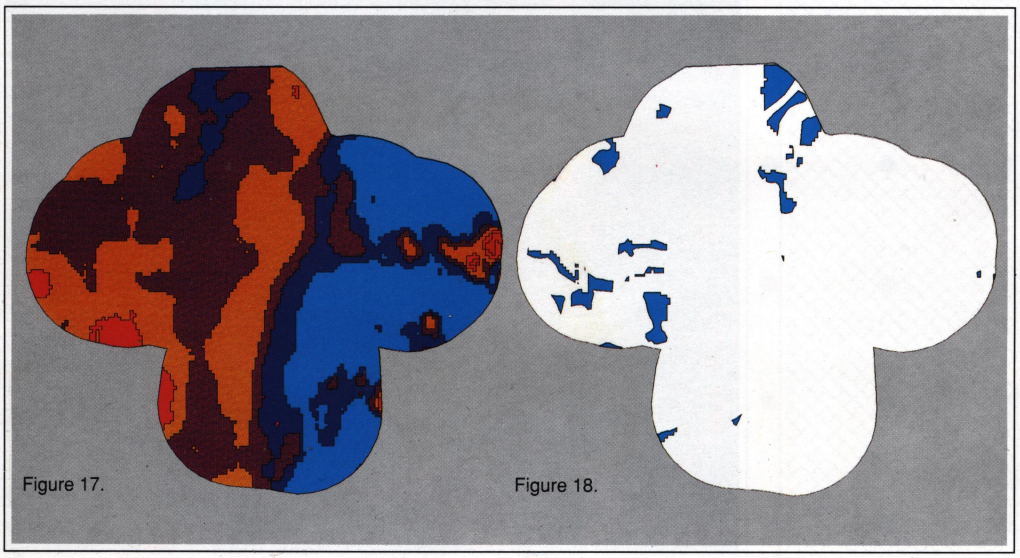

Figure 17.

Figure 18.

Figure 17. A GIS was used to subtract bedrock elevation from surface elevation producing a map showing the thickness of water-saturated sediments in the water service area.

Figure 18. Potential sites with saturated thicknesses of sediments greater than 40 feet.

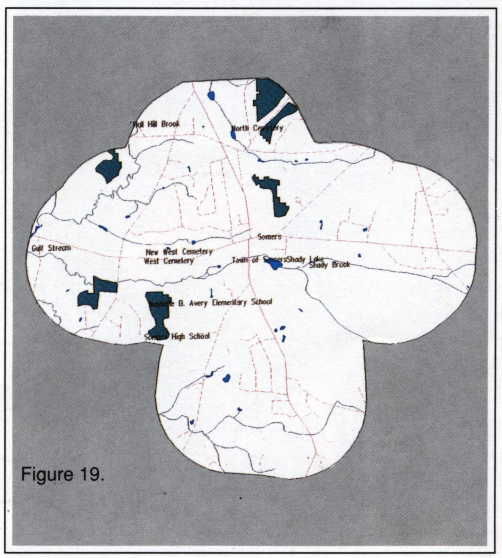

Figure 19.

Figure 19. Potential well sites, roads, streams, and place names.

Emergency response planning

The Wasatch Fault zone runs through Salt Lake City along the foot of the Wasatch Mountains in north-central Utah (fig. 20). A GIS was used to combine road network and earth science information to analyze the effect of an earthquake on the response time of fire and rescue squads. The area covered by the USGS Sugar House 7.5-minute topographic quadrangle map was selected for the study because it includes both undeveloped areas in the mountains and a portion of Salt Lake City. Detailed earth science information was available for the entire area.

The road network from a USGS digital line graph includes information on the types of roads, which range from rough trails to divided highways (fig. 21). The locations of fire stations were plotted on the road network, and a GIS function called network analysis was used to calculate the time necessary for emergency vehicles to travel from the fire stations to different areas of the city. The network analysis function considers two elements: distance from the fire station, and speed of travel based on road type. The analysis shows that under normal conditions, most of the area within the city will be served in less than 7 minutes and 30 seconds because of the distribution and density of fire stations and the continuous network of roads.

The accompanying illustration (fig. 22) depicts the blockage of the road network that would result from an earthquake by assuming that any road crossing the fault trace would become impassable. The primary effect on emergency response time would occur in neighborhoods west of the fault trace, where travel times from the fire stations would be lengthened noticeably.

The Salt Lake City area lies on lake sediments of varying thicknesses. These sediments range from clay to sand and gravel, and most are water saturated. In an earthquake, these materials may momentarily lose their ability to support surface structures, including roads. The potential for this phenomenon, known as liquefaction, is shown in a composite map portraying the inferred relative stability of the land surface during an earthquake. Areas near the fault and underlain by thick, loosely consolidated, water-saturated sediments will suffer the most intense surface motion during an earthquake (fig. 23). Areas on the mountain front with thin surface sediments will experience less additional ground acceleration. The map of liquefaction potential was combined with the road network analysis to show the additional effect of liquefaction on response times.

The final map shows that areas near the fault, as well as those underlain by thick, water-saturated sediments, are subject to more road disruptions and slower emergency response than are other areas of the city (fig. 24).

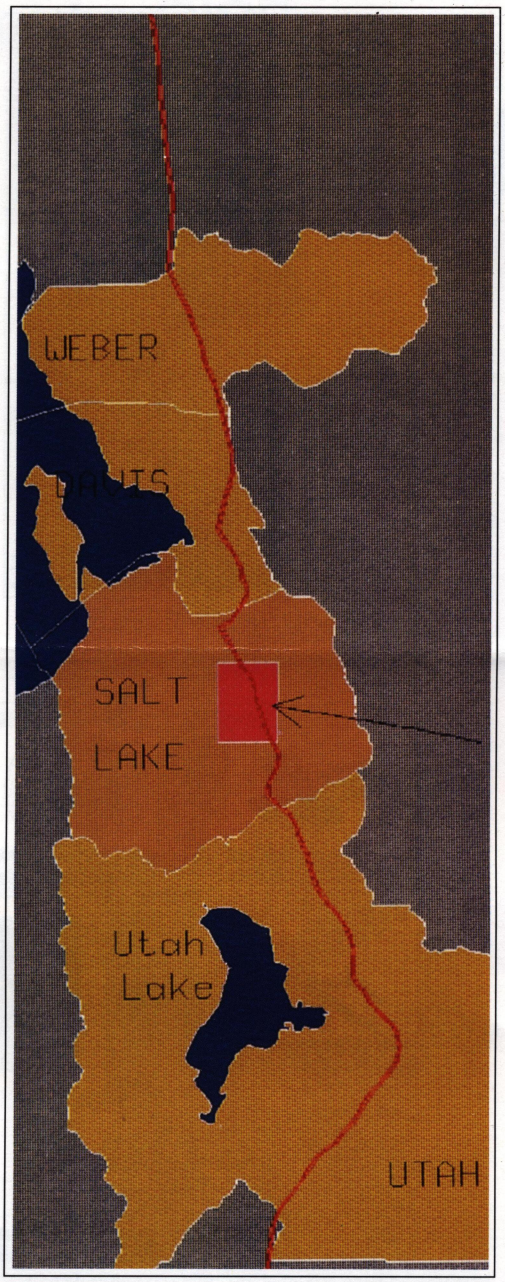

Figure 20. Map of USGS Sugar House 7.5-minute quadrangle, Salt Lake City, UT, showing the location of the Wasatch Fault zone.

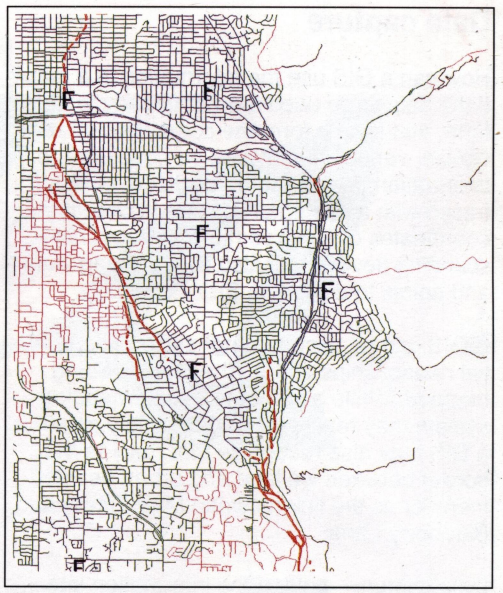

Figure 22. Network analysis in a GIS produces a map of travel times from fire stations after faulting. The fault is shown in red.

Figure 23. Map showing potential for liquefaction of the ground during an earthquake in the area covered by the Sugar House quadrangle.

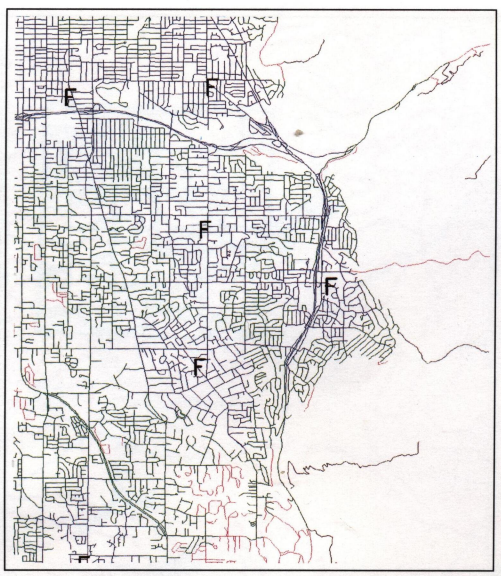

Figure 21. Road network of area covered by the Sugar House quadrangle plotted from USGS digital line graph data. This network indicates the locations of fire stations and travel times of emergency vehicles. Areas shown in magenta have the longest travel times.

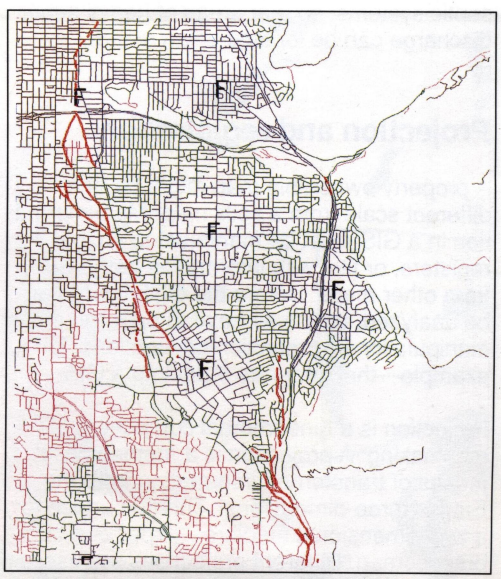

Figure 24. Map combining the liquefaction potential with the road network analysis shown in fig. 22 to produce a final model of the effect of an earthquake on emergency travel times.

Graphic display techniques

Traditional maps are abstractions of the real world, a sampling of important elements portrayed on a sheet of paper with symbols to represent physical objects. People who use maps must interpret these symbols. Topographic maps show the shape of the land surface with contour lines. The actual shape of the land can be seen only in the mind's eye. Graphic display techniques in GIS's make relationships among map elements visible, heightening one's ability to extract and analyze information.

Two types of data were combined in a GIS to produce a perspective view of a portion of San Mateo County, California. The digital elevation model, consisting of surface elevations recorded on a 30-meter horizontal grid, shows high elevations as white and low elevations as black (fig. 28). The accompanying Landsat Thematic Mapper image shows a false-color infrared image of the same area in 30-meter pixels, or picture elements (fig. 29). A GIS was used to register and combine the two images to produce the three-dimensional perspective view looking down the San Andreas Fault (fig. 30).

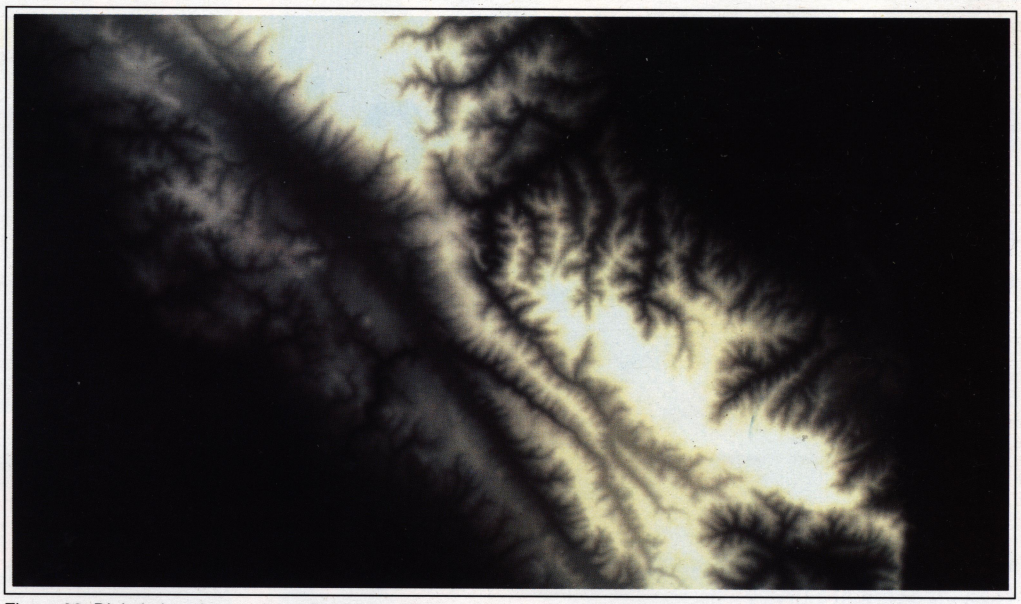

Figure 28. Digital elevation model of San Mateo County, CA.

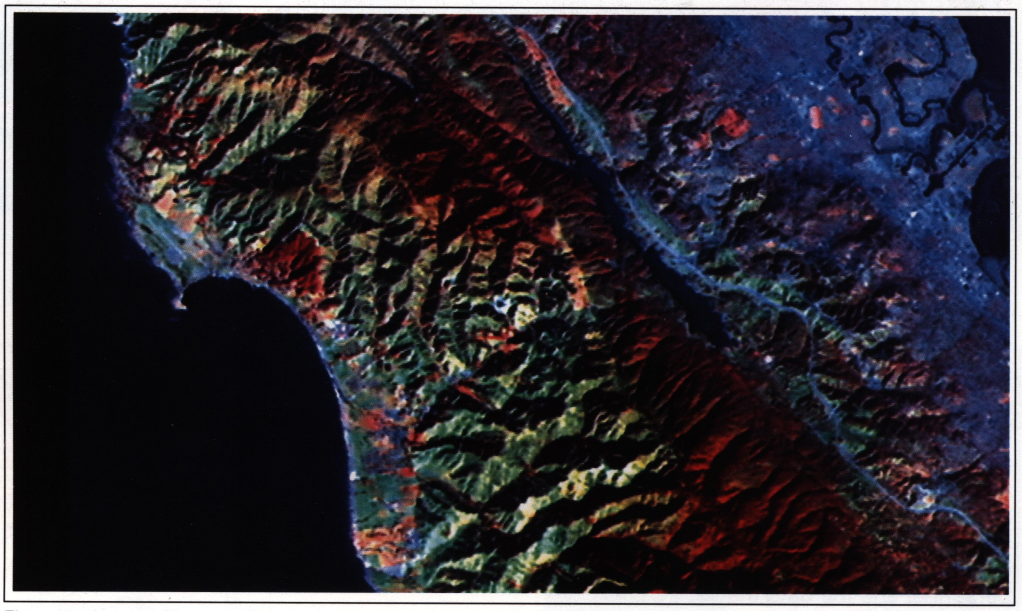

Figure 29. Landsat Thematic Mapper image of San Mateo County, CA.

The future of GIS

Many disciplines can benefit from GIS techniques. An active GIS market has resulted in lower costs and continual improvements in the hardware and software components of GIS. These developments will, in turn, result in a much wider application of the technology throughout government, business, and industry.

Global change research

Maps have traditionally been used to explore the Earth and to exploit its resources. GIS technology, as an expansion of cartographic science, has enhanced the efficiency and analytic power of traditional mapping. Now, as the scientific community recognizes the environmental consequences of human activity, GIS technology is becoming an essential tool in the effort to understand the process of global change. Various map and satellite information sources can be combined in models that simulate the interactions of complex natural systems.

Through a function known as visualization, a GIS can be used to produce images—not just maps, but drawings, animations, and other cartographic products. These images allow researchers to view their subjects in ways that literally never have been seen before. The images often are equally helpful in conveying the technical concepts of GIS study subjects to non-scientists.

Adding the element of time

The condition of the Earth's surface, atmosphere, and subsurface can be examined by

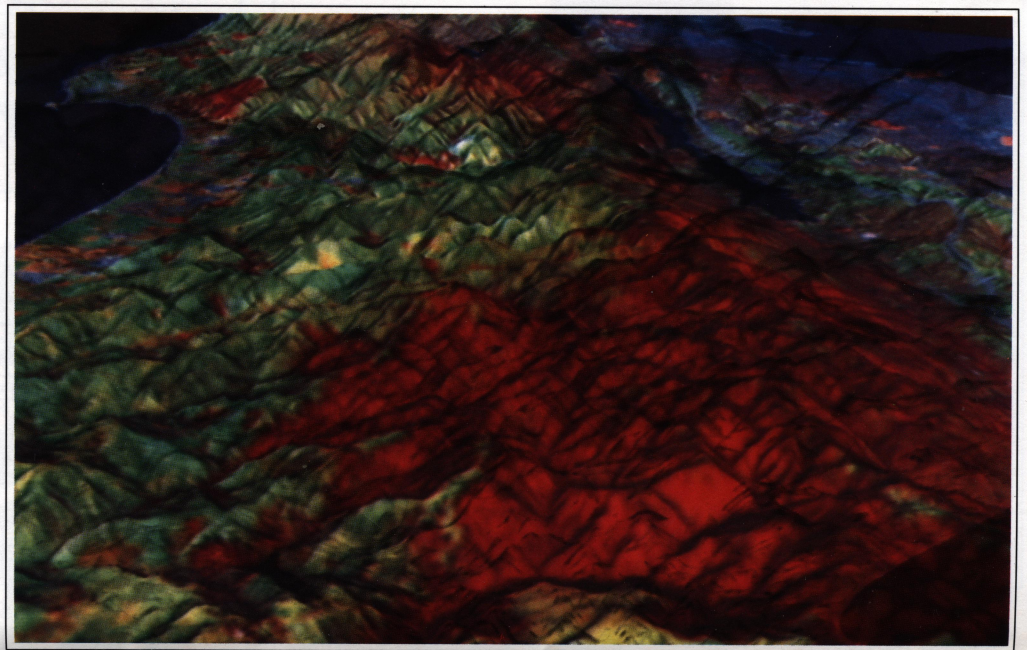

Figure 30. Perspective view of San Mateo County, CA

magenta have the longest travel times.

Simulating environmental effects

The National Forest Service was offered a land swap by a mining company seeking development rights to a mineral deposit in the Prescott National Forest of Arizona. Using a GIS and a variety of digital maps, the USGS and the Forest Service created perspective views of the area to depict the terrain before and after mining (figs. 25–27). Existing digital data were combined in a GIS and displayed using a function that creates perspective drawings.

The mining company provided planimetric (two-dimensional) drawings of the proposed mine (fig. 26). This plan was digitized, along with elevation information on the proposed mine and associated piles and ponds. The resulting perspective view illustrates the dramatic changes to the topography that mining would cause (fig. 27).

A GIS can combine map types and display them in realistic three-dimensional perspective views that convey information more effectively and to wider audiences than traditional, two-dimensional maps.

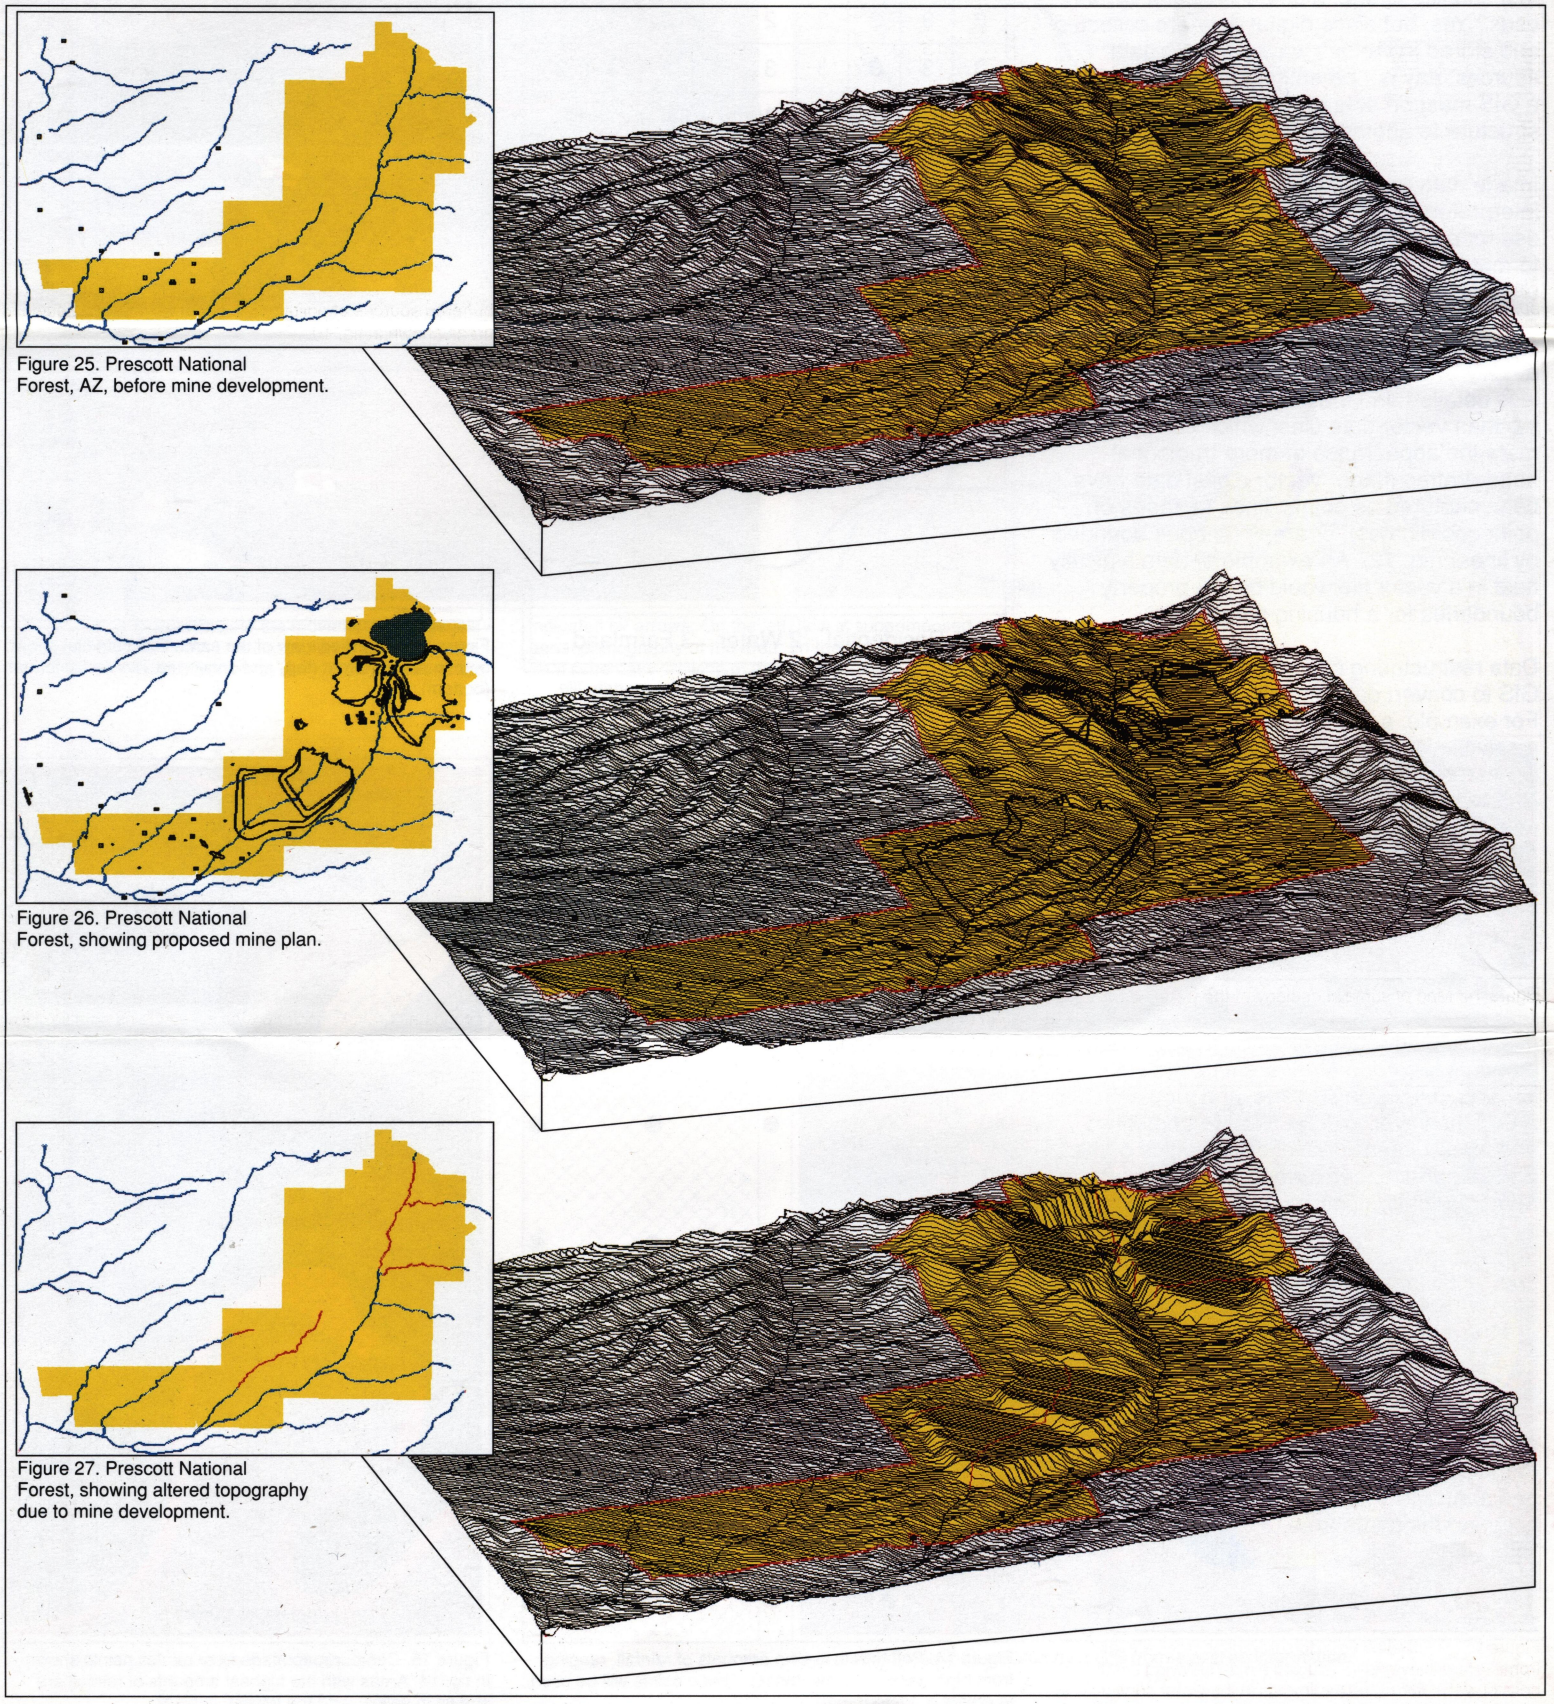

Figure 25. Prescott National Forest, AZ, before mine development.

Figure 26. Prescott National Forest, showing proposed mine plan.

Figure 27. Prescott National Forest, showing altered topography due to mine development.

feeding satellite data into a GIS. GIS technology gives researchers the ability to examine the variations in Earth processes over days, months, and years. As an example, the changes in vegetation vigor through a growing season can be animated to determine when drought was most extensive in a particular region. The resulting graphic, known as a normalized vegetation index, represents a rough measure of plant health (fig. 31). Working with two variables over time will allow researchers to detect regional differences in the lag between a decline in rainfall and its effect on vegetation.

These analyses are made possible both by GIS technology and by the availability of digital data on regional and global scales. The satellite sensor output used to generate the vegetation graphic is produced by the Advanced Very High Resolution Radiometer or AVHRR. This sensor system detects the amounts of energy reflected from the Earth's surface across various bands of the spectrum for surface areas of about 1 square kilometer. The satellite sensor produces images of a particular location on the Earth twice a day. AVHRR is only one of many sensor systems used for Earth surface analysis. More sensors will follow, generating ever greater amounts of data.

GIS and related technology will help greatly in the management and analysis of these large volumes of data, allowing for better understanding of terrestrial processes and better management of human activities to maintain world economic vitality and environmental quality.

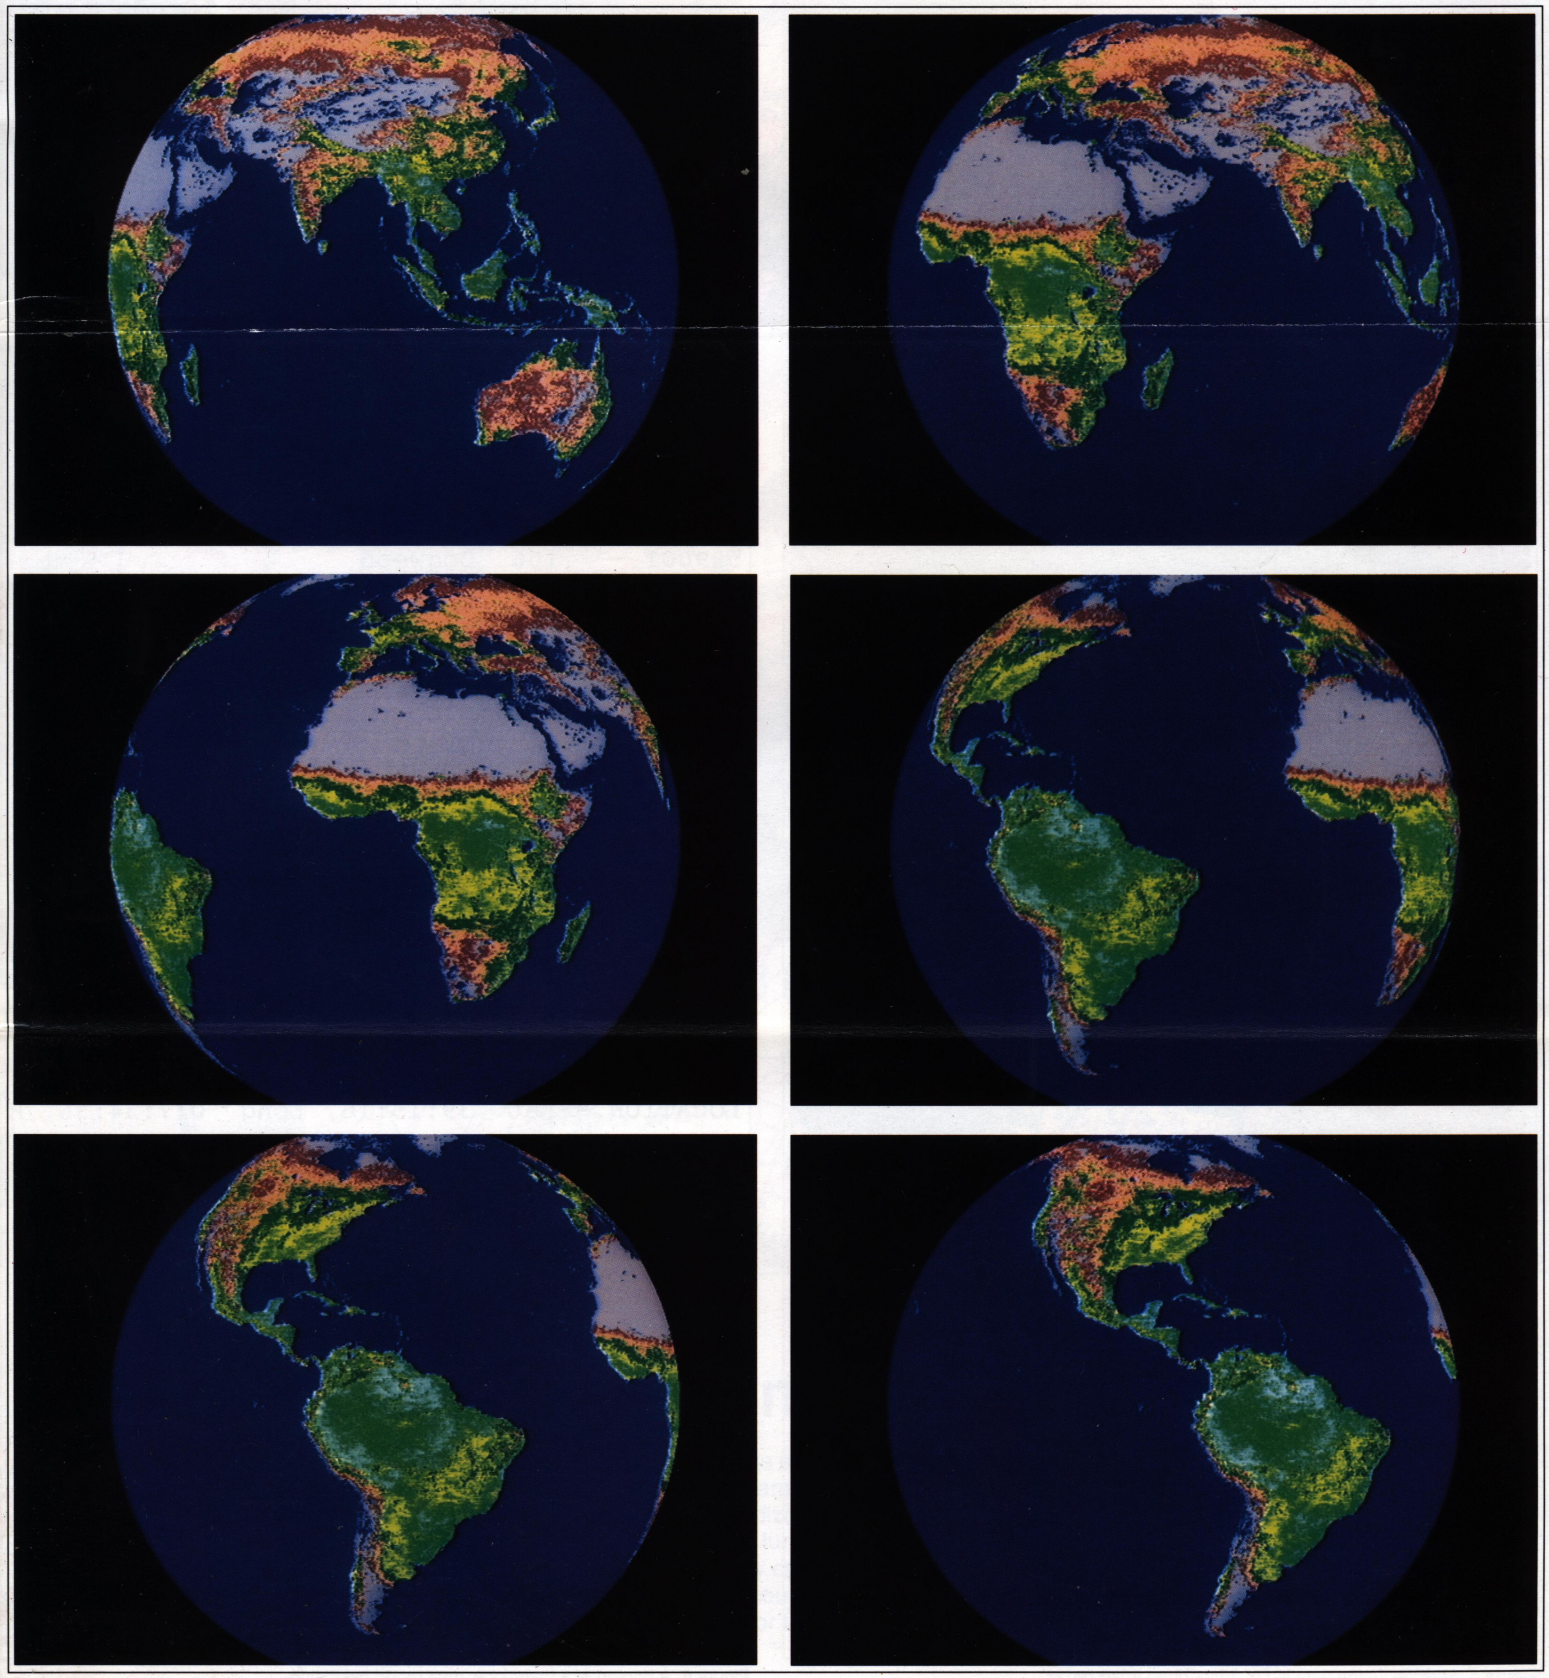

Figure 31. One time slice of the vegetation index for the entire globe from AVHRR data.